



The Best Resource On The Planet.

Baileigh Industrial is an international provider of quality metal and woodworking equipment. Our proven industry leadership results in profitable solutions for any job you may have. You can rely on our global experience, our in-depth expertise, and our unwavering commitment to your absolute satisfaction.

Professional Problem Solvers.

We're all the help you need. Our knowledgeable team of expert engineers provides personal attention and individualized service. We know that the right equipment can maximize your efficiencies and improve productivity. That's why we take the time to thoroughly understand your project needs, so we can recommend and engineer a superior solution to meet them—and exceed your expectations.

Built To Perform, Priced To Compete.

We offer hardworking equipment for hardworking people, just like you. Our high-performance equipment is designed to stand up to all your tough jobs. Every product represents superior design, innovative technology, state-of-the-art features, and affordable quality. It's reliability at the best value for your business dollar. All so you can achieve peak performance with each and every project.

Specializing In Your Satisfaction.

We're passionate about customer service, and it shows. Our friendly and knowledgeable staff is always ready to assist you with your business needs. You won't find another company that can top our commitment to excellence—in service, products, and support.

Router Tables	2
Table Saws	7
Sliding Table Saws	16
Multi Function Machines	18
Jointers	20
Planers	26
Combination Jointers/Planers	30
Spindle Shapers	34
Oscillating Sanders	41
Edge Sanders	42
Drum Sanders	46
Industrial Abrasives	49
Vertical Band Saws	50
Drill Presses	54
Mortisers	58
Lathes	62
Dust Collectors	66
Down Draft Tables	72
Dust Collection Accessories	74

Specifications are subject to change without notice.

CNC Router – WR-23



Hand held controller




Industrial cable track



Inverter driven



Water cooled spindle

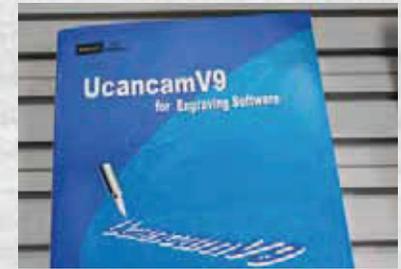

Software included



SPECIFICATIONS	
Power	220V Single Phase
Horse Power	3
Length	48"
Width	40"
Height	45"
Weight (lbs.)	650
Actual Working Area	39" x 31.5"
RPM	0 – 24000
Z Axis Stroke	3.1"
Max. Moving Speed	236 (Inches per Min.)
Max. Engraving Speed	157 (Inches per Min.)
Reposition Accuracy	.0001"
Tool Diameters	1/8" & 1/4"
Table Style	PVC

The WR-23 CNC router from Baileigh Industrial is great for sign making, 3D embossing, and even acrylic cutting. This great little table is designed after our very popular metal cutting plasma tables. It features an extremely rigid fully welded frame with ball screws. There are also square slide ways to keep everything in alignment. The table itself runs on 220 volt single phase and uses stepper motors to move at a maximum speed of 236 (inches/min.). Controlling the

WR-23 is easy as it uses a USB interface in conjunction with a hand held controller. It comes standard with cam software that allows you to set up whatever you like. In order to get the best cut available the variable speed spindle turns at an amazing 24000 rpm. When spinning at that speed a dust collector is also fitted to keep the shop clean and free from debris. And so that tooling is easy to find, the WR-23 CNC router table includes two collets; 1/8" and 1/4".



SCAN FOR MORE INFORMATION

CNC Router – WR-48




Easy set up



Includes bit set



One shot oil system

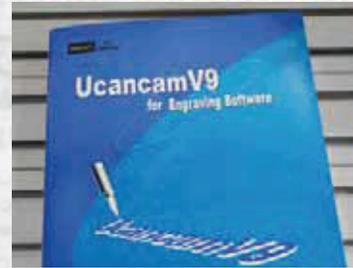

Software included



Water cooled spindle

SPECIFICATIONS

Power	220V Single Phase
Horse Power	4
Length	120"
Width	70"
Height	45"
Weight (lbs.)	2500
Actual Working Area	98" x 51"
Speeds	Variable
RPM	0 – 24000
Z Axis Stroke	7.5"
Max. Moving Speed	787 (Inches per Min.)
Max. Engraving Speed	787 (Inches per Min.)
Reposition Accuracy	.0015"
Tool Diameters	1/8", 1/4" & 1/2"
Table Style	PVC



Bringing in much of the technology that Baileigh Industrial learned from its CNC line of plasma tables, the WR-48 CNC routing table is one of the best values on the market. This 4' x 8' table is perfect for production of closet doors, for solid wood processing, furniture, and a whole lot more. And because of its included dust vacuum, it handles MDF with ease. The WR-48 is built to last and features an extremely rigid fully welded frame.

This 220 volt single phase machine uses stepper motors with square rails to move along the X, Y, and Z axis and have a maximum engraving speed of 787 (inches/min.). The spindle speeds are variable and range from 6000 to 24000 rpm. Controlling the WR-48 is easy as it uses a USB interface in conjunction with a hand held controller. It comes standard with cam software that allows you to set up whatever you like.



SCAN FOR MORE INFORMATION

CNC Router – WR-48V



Hand held controller




Industrial cable track



Inverter driven



Water cooled spindle

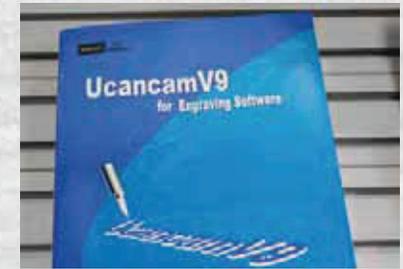

Software included



SPECIFICATIONS	
Power	220V 3-Phase
Horse Power	4
Length	120"
Width	70"
Height	45"
Weight (lbs.)	2500
Actual Working Area	98" x 51"
Speeds	Variable
RPM	0 – 24000
Z Axis Stroke	7.5"
Max. Moving Speed	787 (Inches per Min.)
Max. Engraving Speed	787 (Inches per Min.)
Reposition Accuracy	.0015"
Tool Diameters	1/8", 1/4" & 1/2"
Table Style	Vacuum

The WR-48V is the next evolution in our line of CNC Router tables. We listened to our customers and have now added a vacuum table to this already great package. The WR-48V is a 4' x 8' table and is perfect for production of closet doors, for solid wood processing, furniture and a whole lot more. Built to last years in any shop the WR-48V has an all welded frame that makes it unique for a machine in its price point. Just the like its little brother the WR-48 this 220 volt single phase machine uses stepper motors with square rails

to move along the X, Y and Z axis and have a maximum engraving speed of 20000mm minute. The spindle speeds are variable and range from 6000 to 24000 rpm. Controlling the WR-48 is easy as it uses a USB interface in conjunction with a hand held controller. It comes standard with cam software that allows you to set up whatever you like. Other features that set the WR-48V apart are that it includes a water cooled spindle, one shot oil system and a set of router bits to get you started.



SCAN FOR MORE INFORMATION

CNC Router – WR-510V-ATC



Liner tools



Yaskawa servo motor



Main spindle

SPECIFICATIONS

Power	220V 3-Phase
Horse Power	4
Length	168"
Width	72"
Height	45"
Weight (lbs.)	3200
Actual Working Area	118" x 59"
Speeds	Variable
RPM	6000 – 24000
Z Axis Stroke	7.5"
Max. Moving Speed	2362 (Inches per Min.)
Max. Engraving Speed	984 (Inches per Min.)
Reposition Accuracy	.0015"
Tool Diameters	1/8", 1/4" & 1/2"
Table Style	Vacuum
Magazine Size	8 Tools



Sometimes when using a CNC router table to make profiles it is necessary to change out tooling. But on a standard machine it might not be as easy as just changing the bit, there are things like tool height to worry about and any little difference can make a huge difference to the finished product. That is where the WR-510V-ATC from Baileigh Industrial comes in. This 5' x 10' router table includes an automatic tool change system that allows the operator to program tool changes right into their program. This unique system can

not only change out tools but uses a sensor to compensate for the tool length. With a holder that can accommodate 8 tools and a change over time that only takes 8 seconds, this is one productive machine. Other features of this great machine are its 5.5kw water cooled spindle and a powerful vacuum table to hold the material during the cutting process. Yaskawa brand servo motors ensure smooth running at fast and slow speeds. Contact Baileigh industrial for more information.



SCAN FOR MORE INFORMATION

Router Table – RTS-3012



Integrated power switch



Inserts included



Large fence with hold downs



Sliding table



The RTS-3012 sliding router table from Baileigh Industrial makes routing large pieces of wood easier than by hand. It has a precision machined cast aluminum sliding table that tilts to 45 degrees. The main table is 30" x 10" with the sliding portion 2" wider. It has an all steel stand that is rigid and strong enough for any model router (not supplied). The RTS-3012 has a 10.5" x 2" fence with two different table inserts, 4" x 2-1/4" and 4" x 1-1/8". An integrated 110 volt plug and emergency stop switch for safety is also included.

SPECIFICATIONS

Power	Portable Router
Outlet Size	2"
Number of Outlets	1
Length	36"
Width	28"
Height	38"
Weight (lbs.)	150
Table Size (Length)	31"
Table Size (Width)	12.2"
Fence Size	10.5" x 2"
Table Tilt (Degrees)	45




45 Degree tilting table for easy router placement



SCAN FOR MORE INFORMATION

Table Saw – TS-1020WS

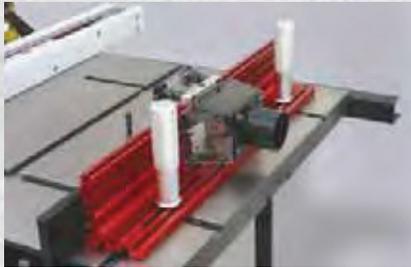

Complete router table included



Birdseye view



Heavy duty rip fence



Sliding table included



Dado insert included

SPECIFICATIONS	
Power	220V single phase
Horse Power	3
Outlet Size	4"
Number of Outlets	1
Length	67"
Width	48"
Height	34"
Weight (lbs.)	638
Table Size (Length)	27"
Table Size (Width)	20"
Table Saw–Blade Dia.	10"
Table Saw–RPM	4300
Table Saw–Arbor	5/8"
Cutting Height @ 90°	3-1/8"
Cutting Height @ 45°	2-3/16"
Maximum Dado Dia.	8"
Maximum Dado Width	13/16"
Maximum Rip Cut (Right)	29"



SCAN FOR MORE INFORMATION



The TS-1020WS work station table saw is the ultimate processing center for the small wood working shop. The TS-1020WS is unique in that it is a 10" sliding table saw with a built in router table. It features a 220 volt single phase 3 hp Leeson motor that spins at 4300 rpm and has thermal overload protection to ensure long life. This saw is truly the best value in woodworking

today. The main table on the TS-1020WS work station table saw is 20" x 27" and has a deluxe rip fence system for accuracy and reliability. The fence also has replaceable nylon sides. All fences and fixtures are included with this great package. A 4" dust collection port is integrated into the TS-1020WS to help keep a clean shop.

Table Saw – TS-1040C



Safety guard



Riving knife



Easy adjust blade angle



Extruded aluminum rails



Heavy duty rip fence with micro adjust



SCAN FOR MORE INFORMATION



A top notch contractor saw is a must have for any woodworker that has to travel to a job site. The TS-1040C from Baileigh Industrial is a great example of just such a saw. This 110 volt 1.5 hp table saw rotates its 10" blade at a robust 4000 rpm. This is a left tilt saw that will go to a full 45 degrees and has rip capacities of 12" left and 30"

right. The machined cast iron main table is 20" x 25" and includes two 10" sheet metal extensions. Working height is a perfect 36.5" with heavy duty steel stand, and can be operated with out stand for job site work. The rip fence features a quick release handle with micrometer adjustment. The safety guard is UL and CSA approved.

SPECIFICATIONS

Power	110/220V Single Phase (Prewired 110V)
Horse Power	1.5
Outlet Size	2.5"
Number of Outlets	1
Length	45"
Width	27"
Height	36.5"
Weight (lbs.)	235
Table Size (Length)	20"
Table Size (Width)	25"
Table Saw-Working Table	40" x 25-1/4"
Table Saw-Blade Dia.	10"
Table Saw-RPM	4000
Table Saw-Arbor	5/8"
Cutting Height @ 90°	3-1/8"
Cutting Height @ 45°	2-1/8"
Maximum Dado Dia.	8"
Maximum Dado Width	13/16"
Maximum Rip Cut (Right)	30"

Table Saw – TS-1044H



Fully cast miter gauge



Optional dado insert available



Rip fence DRO



Sturdy fabricated cabinet



Unique four-piece guard

SPECIFICATIONS	
Power	110V
Horse Power	1.75
Outlet Size	4"
Number of Outlets	1
Length	48"
Width	29"
Height	37"
Weight (lbs.)	260
Table Size (Length)	20"
Table Size (Width)	27"
Table Saw–Working Table	44" x 27"
Table Saw–Blade Dia.	10"
Table Saw–RPM	4000
Table Saw–Arbor	5/8"
Cutting Height @ 90°	3-1/8"
Cutting Height @ 45°	2-1/8"
Maximum Dado Dia.	8"
Maximum Dado Width	13/16"
Maximum Rip Cut (Right)	36"



SCAN FOR MORE INFORMATION

Trying to figure out if you need a cabinet saw or just a contractor style saw? Well Baileigh Industrial might just have the answer for you, the TS-1044H 10" hybrid table saw is the best of both worlds. The voltage and mobility of a contractor saw, with the structure and accuracy of a good cabinet saw. The TS-1044H has a 1.75 hp motor that can be run on either 110 or 220 volt single phase power and turns at 4000 rpm. Since the voltage is selectable the TS-1044H hybrid saw will work in just about

any shop home or professional. The TS-1044H has an enormous 44" x 27" all machined cast iron table. Another unique feature of the TS-1044H is the heavy duty rip fence that incorporates a digital readout for rip capacity. Just "zero" the DRO at the blade and away you go. No second guessing the cut dimension. Other standard features to the TS-1044H are; miter gauge, zero clearance table inserts, deluxe rip fence, and 4" dust collection port.

Table Saw – TS-1040E-30



Dado insert included



Heavy duty rip fence



Large power switch



Massive trunnion



True riving knife



SCAN FOR MORE INFORMATION



If you are looking for a great entry level cabinet maker table saw, take a look at the TS-1040E-30 from Baileigh Industrial. This saw has many features only found on more expensive saws. Available with 30" right side rip capacities, this 10" table saw will be at home in any shop. The TS-1040E-30 has a 2 hp motor that can be run on either 110 or 220 volt single phase power and

turns at 3850 rpm. The main table and extensions for the TS-1040E are made from precision ground cast iron and are large enough to handle even the largest boards. Other standard features to the TS-1040E series are; miter gauge, standard and dado inserts, deluxe rip fence and 4" dust collection port.

SPECIFICATIONS

Power	220V
Horse Power	2
Outlet Size	4"
Number of Outlets	1
Length	60"
Width	38"
Height	40"
Weight (lbs.)	370
Table Size (Length)	20"
Table Size (Width)	27"
Table Saw—Working Table	40" x 27"
Table Saw—Blade Dia.	10"
Table Saw—RPM	3850
Table Saw—Arbor	5/8"
Cutting Height @ 90°	3-1/8"
Cutting Height @ 45°	2-3/16"
Maximum Dado Dia.	8"
Maximum Dado Width	13/16"
Maximum Rip Cut (Right)	30"

Table Saw – TS-1040E-50



Large power switch



Miter gauge



Heavy duty rip fence



Dado insert included



SCAN FOR MORE INFORMATION

SPECIFICATIONS	
Power	220V
Horse Power	2
Outlet Size	4"
Number of Outlets	1
Length	60"
Width	38"
Height	40"
Weight (lbs.)	390
Table Size (Length)	20"
Table Size (Width)	27"
Table Saw–Working Table	40" x 27"
Table Saw–Blade Dia.	10"
Table Saw–RPM	3850
Table Saw–Arbor	5/8"
Cutting Height @ 90°	3-1/8"
Cutting Height @ 45°	2-3/16"
Maximum Dado Dia.	8"
Maximum Dado Width	13/16"
Maximum Rip Cut (Right)	50"



If you are just getting started in the woodworking industry, the TS-1040E-50 from Baileigh Industrial is a dream saw and comes with many features that only the higher priced saws have. A massively overbuilt trunnion is mated to the cabinet and not to the table for the most rigid setup possible. The TS-1040E-50 also lets you chose between 110 volt or 220 volt to power its 2 hp motor. The

TS-1040E-50 has a 50" extension board. Extension boards are great for those materials that are really big and tough to handle. A true riving knife system is also standard to help eliminate kick back. Other standard features to the TS-1040E series are; miter gauge, standard and dado inserts, deluxe rip fence and 4" dust collection port.


Table Saw – TS-1040P-30



Dado insert included



Heavy duty rip fence



Massive dovetail trunnion



Miter fence extension with flip stop



Quick change riving knife



SCAN FOR MORE INFORMATION



Professional cabinet table saws are a must for any woodworking shop. The TS-1040P-30 riving knife table saw is a great saw for making perfect joints in cabinets and other projects. Available in two versions the TS-1040P-30 and the TS-1040P-50, the last number refers to the length of the right side rip capacities. This 10" table saw will be at home in any shop because of the 3 hp Leeson motor that can be run on 220 volt single phase power and turns at 4300 rpm. The main table

extensions for the TS-1040P-30 are made from precision ground cast iron. These tables are placed upon a super rigid all steel base for accurate alignment. The TS-1040P-30 has a massive dovetail trunnion that is integrated right into the cabinet for perfect alignment. Other standard features to the TS-1040E series are; miter gauge, standard and dado inserts, deluxe rip fence and 4" dust collection port.

SPECIFICATIONS	
Power	220V Single Phase
Horse Power	3
Outlet Size	4"
Number of Outlets	1
Length	60"
Width	38"
Height	40"
Weight (lbs.)	550
Table Size (Length)	20"
Table Size (Width)	27"
Table Saw-Working Table	40" x 27"
Table Saw-Blade Dia.	10"
Table Saw-RPM	4300
Table Saw-Arbor	5/8"
Cutting Height @ 90°	3-1/8"
Cutting Height @ 45°	2-3/16"
Maximum Dado Dia.	8"
Maximum Dado Width	13/16"
Maximum Rip Cut (Right)	30"

Table Saw – TS-1040P-50



Heavy duty rip fence



Ground and polished table



Massive trunnion



Dado insert included



Easy to read miter gauge

SPECIFICATIONS

Power	220V Single Phase
Horse Power	3
Outlet Size	4"
Number of Outlets	1
Length	60"
Width	38"
Height	40"
Weight (lbs.)	590
Table Size (Length)	20"
Table Size (Width)	27"
Table Saw–Working Table	40" x 27"
Table Saw–Blade Dia.	10"
Table Saw–RPM	4300
Table Saw–Arbor	5/8"
Cutting Height @ 90°	3-1/8"
Cutting Height @ 45°	2-3/16"
Maximum Dado Dia.	8"
Maximum Dado Width	13/16"
Maximum Rip Cut (Right)	50"



SCAN FOR MORE INFORMATION

The TS-1040P-50 is the exact same machine as the TS-1040P-30 but has a massive 50" rip capacity because of its 50" extension board. Extension boards are great for those materials that are really big and tough to handle. Like the TS-1040P-30, this 10" table saw features a 3 hp Leeson motor that can be run on 220 volt single phase power and turns at 4300 rpm. A massive cabinet mounted

dovetail trunnion is also part of this great package. The main table on the TS-1040P-50 is made from ground and polished cast iron for long life. This table is set upon an all steel base for rigidity. Other standard features to the TS-1040E series are; miter gauge, standard and dado inserts, deluxe rip fence and 4" dust collection port.

Table Saw – TS-1248P-36



Unique four piece guard



Heavy duty rip fence with DRO



Ground and polished table



5 Hp motor with dust extraction tube



DRO for blade angle



SCAN FOR MORE INFORMATION



When looking for a truly professional cabinet table saw, good capacity and power are a must. The TS-1248P-36 is a 12" diameter blade table saw. The TS-1248P-36 has a 36" right side rip capacity. It runs on 220 volt single phase 5 hp motor that produces 3600 rpm. Because of the extra power the TS-1248P has a 1" arbor that tilts 45 degrees to the left. A 5/8" arbor is also available as an option. To make operation even easier the bevel has a digital readout for increased accuracy. Another unique feature of

the TS-1248P-36 is the rip fence that incorporates a digital readout for rip capacity. Just "zero" the DRO at the blade and away you go. No second guessing the length of cut. The table and extensions for the TS-1248P-36 are made from precision ground cast iron. These tables are placed upon a super rigid all steel base for accurate alignment. The Other standard features to the TS-1248P series are; miter gauge, deluxe rip fence and 4" dust collection port.

SPECIFICATIONS

Power	220V Single Phase
Horse Power	5
Outlet Size	4"
Number of Outlets	1
Length	49"
Width	32"
Height	37"
Weight (lbs.)	680
Table Size (Length)	24.4"
Table Size (Width)	30.7"
Table Saw-Working Table	48.4" x 30.7"
Table Saw-Blade Dia.	12
Table Saw-RPM	3600
Table Saw-Arbor	1"
Cutting Height @ 90°	4"
Cutting Height @ 45°	2-3/4"
Maximum Dado Dia.	8"
Maximum Dado Width	13/16"
Maximum Rip Cut (Right)	36"

Table Saw – TS-1248P-52



52 inch extension table



Easy adjustment access



Includes two rifing knives



Dado insert available
SKU 1008085



SCAN FOR MORE INFORMATION

SPECIFICATIONS	
Power	220V Single Phase
Horse Power	5
Outlet Size	4"
Number of Outlets	1
Length	49"
Width	32"
Height	37"
Weight (lbs.)	700
Table Size (Length)	24.4"
Table Size (Width)	30.7"
Table Saw—Working Table	48.8" x 30.7"
Table Saw—Blade Dia.	12"
Table Saw—RPM	3600
Table Saw—Arbor	1"
Cutting Height @ 90°	4"
Cutting Height @ 45°	2-3/4"
Maximum Dado Dia.	8"
Maximum Dado Width	13/16"
Maximum Rip Cut (Right)	52"



Professionals are looking for the best and the TS-1248P-52 is just that. The TS-1248P-52 has an extension for 52" right side rip capacity and has a robust 12" diameter blade. It runs on 220 volt single phase 5 hp motor that produces 3600 rpm. Because of the extra power the TS-1248P has a 1" arbor that tilts 45 degrees to the left. Another unique feature of the TS-1248P-52 is the rip fence that incorporates a digital readout for rip capacity.

Just "zero" the DRO at the blade and away you go. No second guessing the length of cut. The table and extensions for the TS-1248P-52 are made from precision ground cast iron. These tables are placed upon a super rigid all steel base for accurate alignment. The Other standard features to the TS-1248P series are; miter gauge, deluxe rip fence and 4" dust collection port.

Sliding Table Saw – STS-14120



Cross cut fence w/digital readout (opt.)
(sts-14120-DRO)




Fully extruded table



Rip fence w/digital readout (opt.)



Table lock



True bar type rollers



SCAN FOR MORE INFORMATION



Also available is the STS-14120-DRO
(with digital readout).



When Baileigh Industrial does something we do it right, the STS-14120 is no exception. This class leading sliding table saw has all the features the most discerning shop could want. The STS-14120 comes standard with a 12" blade but will take a 14" blade without modification and turns on a 1" arbor. The 7.5 hp 220 volt three phase motor has three speeds in which it will cut, by moving the belts. The rpm range is between 3000 and 5000 rpm with a digital readout. A 1 hp scoring blade

is also standard and spins at 8000 rpm to ensure a crisp, clean cut. The STS-14120 has a 15" x 125" sliding table. The fully extruded table slides on four precision shafts for the greatest accuracy possible. The blade tilting uses a manual hand wheel system with digital readout for telling the degrees. All fences are included as well as a deluxe saw guard with dust port are standard. There is also a 4" main dust channel to keep the shop clean.

SPECIFICATIONS

Power	220V Three Phase
Horse Power	7.5
Outlet Size	3" and 5"
Number of Outlets	2
Length	132"
Width	52"
Height	40"
Weight (lbs.)	2250
Table Size (Length)	126"
Table Size (Width)	15"
Speeds	3
Maximum Stock Width	51"
Table Saw-Blade Dia.	12"
Table Saw-RPM	3000/4000/5000
Table Saw-Arbor	1"
Cutting Height @ 90°	4.125"
Cutting Height @ 45°	2.75"
Scoring Blade RPM	8000
Scoring Blade Diameter	4.5"
Scoring Blade Arbor	7/8"
Working Height	32"

Sliding Table Saw – STS-14120-CNC




Cross cut fence w/digital readout



Heavy duty drive system



Powered rip fence

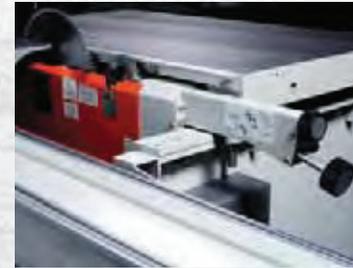

Quick change scoring blade



Touch screen CNC controller

SPECIFICATIONS

Power	220V Three Phase
Horse Power	7.5
Outlet Size	3" and 5"
Number of Outlets	2
Length	132"
Width	52"
Height	40"
Weight (lbs.)	2250
Table Size (Length)	126"
Table Size (Width)	15"
Speeds	4
RPM	3000/4000/5000/6000
Maximum Stock Width	51"
Table Saw–Blade Dia.	12"
Table Saw–Arbor	1"
Cutting Height @ 90°	3.93"
Cutting Height @ 45°	2.75"
Scoring Blade RPM	8000
Scoring Blade Diameter	4.5"
Scoring Blade Arbor	7/8"
Working Height	32"



SCAN FOR MORE INFORMATION

The STS-14120-CNC table saw from Baileigh Industrial is based on our other sliding table saw designs, but adds a CNC twist. The CNC function really helps with accuracy and efficiency of any project. The 5.7" CNC touchscreen control has a 300 profile memory capacity. It controls the cutting width, blade tilting, and main saw blade height. The scoring blade height is also motorized. This class leading sliding table saw has all the features the most discerning shop could want. The STS-14120-CNC comes standard with a 12" blade but will take a 14" blade without modification and turns on a 1" arbor. The 7.5 hp 220 volt three

phase motor has four speeds in which it will cut, by moving the belts. The rpm range is between 3000 and 6000 rpm with a digital readout. A 1 hp scoring blade is also standard and spins at 8000 rpm to ensure a crisp, clean cut. The STS-14120-CNC has a 15" x 125" sliding table. The fully extruded table slides on four precision shafts for the greatest accuracy and smoothest slide possible. All fences are included as well as a deluxe saw guard with dust port are standard. There is also a 4" main dust channel to keep the shop clean. A tool frame and safety bar round out this great package.

Multifunction – MF-3005

SPECIFICATIONS					
Power	220V Single Phase	Planer–Max. Working Height	8.66"	Mortiser–Working Table	9.8" x 20"
Horse Power	3 @ 2.7	Planer–Min. Working Height	0.18"	Mortiser–Longitudinal Stroke	8"
Length	87"	Planer–RPM	5700	Mortiser–Vertical Stroke	3.5"
Width	63"	Planer–Max. Cutting Depth	0.18"	Mortiser–Transversal Stroke	3.7"
Height	35"	Table Saw–Working Table	8.6" x 63"	Mortiser–Maximum Chisel	5/8"
Weight (lbs.)	1200	Table Saw–Blade Diameter	10"	Mortiser–RPM	5700
Jointer–Working Table	12" x 60"	Table Saw–RPM	4500	Shaper–Working Table	8.6" x 39"
Jointer–Cutterhead Diameter	2.75"	Table Saw–Arbor	1.18" (30mm)	Shaper–Speeds	4
Jointer–RPM	5700	Cutting Height @ 90°	3.14"	Shaper–RPM	2000/3100/4100/7000
Jointer–Number of Knives	3	Cutting Height @ 45°	1.96"	Shaper–Shaft Diameter	1-1/8" (30mm)
Jointer–Maximum Table Adj.	1/8"	Scoring Blade RPM	7000	Shaper–Spindle Length	4"
Planer–Working Table	11.8" x 26"	Scoring Blade Diameter	3.5" (90mm)	Shaper–Shaft Vertical Stroke	4.5"
Planer–Feed Speed	23 fpm	Scoring Blade Arbor	7/8" (22mm)	Shaper–Max. Tool Diameter	6.25"



SCAN FOR MORE INFORMATION



Sometimes space determines whether or not a new piece of equipment will be purchased for a shop. The MF-3005 from Baileigh Industrial takes care of that problem. This 5 in 1 combination woodworking machine combines all of the most popular machines into one small foot print. These machines include; 10" sliding

table saw, 12" planer, 12" jointer, 5/8" mortise, and 1-1/8" shaper. Functions are handled by three individual 220 volt single phase motors, with more than enough power for any project. The 10" sliding table saw with scoring has a crosscut capacity of 63". The shaper turns at 3100 rpm with a micro-adjustable easy install fence

that is made of cast-iron and comes with a 4" dust port. Mortising is a snap on the horizontal mortiser that is attached to the 12" jointer which also converts into a planer in less than 30 seconds. For more information on this do it all machine, contact a Baileigh Industrial representative today.

Multifunction – MF-4005

SPECIFICATIONS

Power	220V Single Phase	Planer–RPM	5700	Mortiser–Working Table	9.8" x 20"
Horse Power	3 @ 2.7	Planer–Max. Cutting Depth	3/16"	Mortiser–Longitudinal Stroke	8"
Length	95"	Table Saw–Working Table	12.8" x 87"	Mortiser–Vertical Stroke	3.5"
Width	71"	Table Saw–Blade Diameter	12"	Mortiser–Transversal Stroke	3.7"
Height	35"	Table Saw–RPM	4500	Mortiser–Maximum Chisel	5/8"
Weight (lbs.)	1500	Table Saw–Arbor	1.18" (30mm)	Mortiser–RPM	5700
Jointer–Working Table	15.75" x 71"	Cutting Height @ 90°	3.93"	Shaper–Working Table	12.8" x 43.75"
Jointer–Cutterhead Diameter	2.75"	Cutting Height @ 45°	2.95"	Shaper–Speeds	4
Jointer–RPM	5700	Scoring Blade RPM	7000	Shaper–RPM	2000/3100/4400/7000
Jointer–Number of Knives	3	Scoring Blade Diameter	3.5" (90mm)	Shaper–Shaft Diameter	1-1/8" (30mm)
Jointer–Maximum Table Adj.	1/8"	Scoring Blade Arbor	7/8" (22mm)	Shaper–Spindle Length	4"
Planer–Working Table	15.75" x 30"			Shaper–Shaft Vertical Stroke	4.5"
Planer–Feed Speed	23 fpm			Shaper–Max. Tool Diameter	7.00"
Planer–Max. Working Height	8.66"				
Planer–Min. Working Height	3/16"				




SCAN FOR MORE INFORMATION

The MF-4005 is the larger brother of the MF-3005 from Baileigh Industrial. With the MF-4005 multifunction woodworking machine you get a 5 in 1 machine on steroids, but with the little foot print that these machines are known for. In a lot of cases space will determine the spending budget for a shop and whether you are a professional shop or an educational facility the MF-4005 will expand your potential. This 5 in 1

combination woodworking machine combines all of the most popular machines into one small foot print. These machines include; 12" sliding table saw, 15" planer, 15" jointer, 5/8" mortise, and 1-1/8" shaper. Functions are handled by three individual 220 volt single phase motors, which make changeover time faster and makes the machines operation safer. The 12" sliding table saw with scoring has a crosscut capacity of 86." The shaper

turns at 3100 rpm with a micro-adjustable easy install fence that is made of cast-iron and comes with a 4" dust port. Mortising is a snap on the horizontal mortiser that is attached to the 12" jointer which also converts into a planer in less than 30 seconds. Integrated dust collector ports are also included throughout.

Jointer – IJ-655

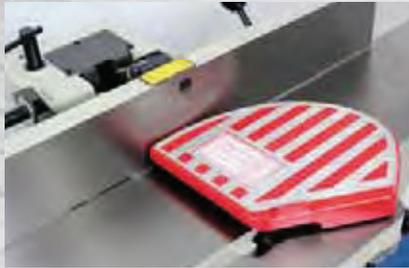

Cast aluminum guard



Easy fence adjustment



Integrated dust port



Quick table adjustment



Smooth milled working tables



Optional Accessories

SKU 1004929 4 Row Spiral Cutter Head

SPECIFICATIONS

Power	110/220V Single Phase (Prewired 110V)
Horse Power	1
Outlet Size	4"
Number of Outlets	1
Weight (lbs.)	230
Table Size (Length)	55"
Table Size (Width)	6"
RPM	5000
Fence Size	4" x 29"
Maximum Depth of Cut	1/8"
Maximum Rabbeting Capacity	1/2"
Cutter Head Diameter	2-1/2"
Maximum Stock Width	6"
Number of Knives	3
Working Height	31"

If you are looking for a well-made affordable wood jointer, then the IJ-655 is for you. This 110V 1hp jointer has more than enough power to take care of any job. The IJ-655 is a 6" wide maximum cut jointer featuring three HSS knives running at 5000 RPM that align themselves in the cutter head for rapid knife changes. The 6" x 55" oversized table is mounted on dovetailed ways

and have a built-in rabbeting ledge. The fence is 29" in length and 4" tall, with positive stops at 90° and 45° right and left. Also included is a quick adjustment lever on the in feed table and has quick set-ups with controlled maximum 1/8" depth of cut. A 4" dust port offers easy connection to any dust collection system. A spiral cutterhead is also available for this machine.



SCAN FOR MORE INFORMATION

Jointer – IJ-666




Adjustable fence



Hand wheel table adjustment



Heavy duty design

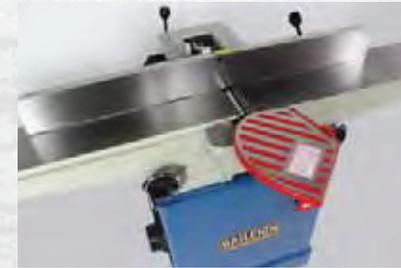

Large oversized fence

SPECIFICATIONS	
Power	110/220V Single Phase (Prewired 110V)
Horse Power	1.5
Outlet Size	4"
Number of Outlets	1
Weight (lbs.)	290
Table Size (Length)	66"
Table Size (Width)	6"
RPM	5000
Fence Size	4" x 38"
Maximum Depth of Cut	1/8"
Maximum Rabbeting Capacity	1/2"
Cutter Head Diameter	2-1/2"
Maximum Stock Width	6"
Number of Knives	3
Working Height	32"



Optional Accessories	
SKU 1004929	4 Row Spiral Cutter Head



The IJ-666 is a long bed version of the IJ-655 jointer from Baileigh Industrial. With an extended table the IJ-666 allows the operator to make truer cuts on longer materials. Along with the longer table it also includes a larger 4" x 38" fence with positive stops at 90° and 45° right and left. Powered by a 110V 1.5hp motor that spins at 5000 rpm this 6' long bed jointer has more than enough

power to take care of any job in any size shop. The IJ-666 can also be wired to run on 220 volt single phase power as well. The 2.5" diameter cutter head has 3 HSS knives with a maximum depth of cut being 1/8". A 4" dust port offers easy connection to any dust collection system. A spiral cutterhead is also available for this machine.



SCAN FOR MORE INFORMATION

Jointer – IJ-875



Easy to read depth gauge



Integrated dust port



Precision ground work surfaces



Quick adjust fence angle



Table adjustments by hand wheel



Optional Accessories	
SKU 1004932	4 Row Spiral Cutter Head



A long bed jointer is quickly becoming the go to for most wood workers because of the ease of material handling and improved accuracy. The IJ-875 from Baileigh Industrial is a great choice for a long bed jointer. This 220 volt 2hp jointer has more than enough muscle to power through any job. The IJ-875 has an 8" wide maximum cut with three HSS knives running at 5000 rpm that align themselves in the 3-1/4" cutter head for rapid knife changes. The IJ-875 has an 8" x 75" oversized table is mounted on dovetailed ways and has

a built-in rabbeting ledge. The fence is 4-3/4" x 38" with positive stops at 90° and 45° right and left. Also included is a quick adjustment lever on the in feed table having quick set-ups with controlled maximum 1/8" depth of cut. A 4" dust port offers easy connection to any dust collection system. A spiral cutterhead is also available for this machine. For more information on this or any other of the Baileigh Industrial jointers, contact a representative today.

SPECIFICATIONS	
Power	220V Single Phase
Horse Power	2
Outlet Size	4"
Number of Outlets	1
Weight (lbs.)	450
Table Size (Length)	75"
Table Size (Width)	8"
RPM	5000
Fence Size	4-3/4" x 38"
Maximum Depth of Cut	1/8"
Maximum Rabbeting Capacity	1/2"
Cutter Head Diameter	3-1/4"
Maximum Stock Width	8"
Number of Knives	3
Working Height	32"



SCAN FOR MORE INFORMATION

Jointer – IJ-883P



8 Inch cutting width



Adjustable fence angle



Belt driven



Hand controls for parallelogram mechanism



Ground and polished work tables

SPECIFICATIONS

Power	220V Single Phase
Horse Power	3
Outlet Size	4"
Weight (lbs.)	540
Table Size (Length)	83"
Table Size (Width)	8"
RPM	5000
Fence Size	5-1/2" x 48"
Maximum Depth of Cut	1/8"
Maximum Rabbeting Capacity	1/2"
Cutter Head Diameter	3-1/4"
Maximum Stock Width	8"
Number of Knives	4



Optional Accessories

SKU 1004934 4 Row Spiral Cutter Head

If you are looking for the most accuracy in an 8" jointer then look no further than the IJ-883P long bed parallelogram jointer from Baileigh Industrial. It has an extra-long 83" bed length for better work support and is equipped with a 5-1/2" x 48" fence that has positive stops at +/-45 and 90 degrees. A non-mar insert in the fence contacts the table to avoid scratching the surface during adjustments. The parallelogram design keeps the table in close proximity to the cutter head for improved finish and allows for a fast depth of cut adjustment to

a maximum of 1/8". This design also insures the table remains perfectly parallel, even after years of use. The IJ-883P uses a 220 volt single phase 3 hp motor to power through even the toughest wood. Spinning at 5000 rpm the IJ-883P has 3 HSS blades on the 3-1/4" diameter cutter head. Plus, by using 220 volt single phase power this joiner can be used just about anywhere. A 4" dust port is also included. A spiral cutterhead is also available for this machine.



SCAN FOR MORE INFORMATION

Jointer – IJ-1288P



12 Inch cutting width



Adjustable fence



Hand wheels for parallelogram



Oversized aluminum guard



Polished work surfaces



Optional Accessories

SKU 1004927 4 Row Spiral Cutter Head

The IJ-1288P long bed parallelogram jointer from Baileigh Industrial is truly unique. This 12" parallelogram jointer offers performance and value in a machine loaded with features. A robust 5 hp motor that runs on 220 Volt single phase power supplies more than enough power to handle the 12" wide cut. It has an extra-long 88" bed for better work support and is equipped with a fence that tilts in and out with stops at 45 and 90 degrees. A non-mar insert in the fence contacts the table to avoid scratching the surface during

adjustments. The parallelogram design keeps the table in close by the cutter head for improved finish and allows for a fast depth of cut adjustment. This design also insures the table remains perfectly parallel, even after years of use. The IJ-1288P has a 1/8" maximum depth of cut with its 4" diameter cutter head that spins at 5000 rpm. The cutter head features 4 HSS knives for long life and great cuts. The IJ-1288P also includes a 6" dust port for a cleaner work area. A spiral cutterhead is also available for this machine.

SPECIFICATIONS

Power	220V Single Phase
Horse Power	5
Outlet Size	6"
Number of Outlets	1
Weight (lbs.)	880
Table Size (Length)	88"
Table Size (Width)	12"
RPM	5000
Fence Size	5.5" x 60"
Maximum Depth of Cut	1/8"
Maximum Rabbeting Capacity	3/4"
Cutter Head Diameter	4"
Maximum Stock Width	12"
Number of Knives	4
Working Height	34"



SCAN FOR MORE INFORMATION

Baileigh Industrial...Around the World—USA World Headquarters

Mission Statement

To be the preferred supplier of quality metal and woodworking equipment, services and systems by profitably responding to our customers needs with dependable delivers, services and products that offer innovative technology and unsurpassed value.




Contact Your Baileigh Industrial Representative TODAY for your NEW Metal Working or Woodworking Machine!

BAILEIGH INDUSTRIAL, INC.
1625 Dufek Drive
Manitowoc, WI 54220
Phone: 920. 684. 4990
Fax: 920. 684. 3944
www.baileigh.com


Planer – IP-156



Triple belt driven

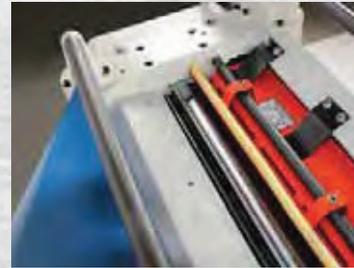

Straight blade knife

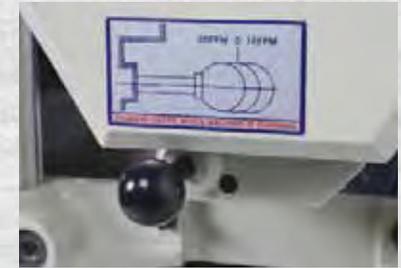

Two speed feed



Anti kickback fingers

The IP-156 planer from Baileigh Industrial combines the best features with an economical price. This standout planer has a 15" wide planning capacity with a 6" maximum cutting height. The IP-156 runs on a 3hp 220 volt single phase motor which allows it to be set up and run almost anywhere. The 3" cutter head turns at 5000 rpm and has a maximum cutting depth of 1/8". This, combined with two cutting speeds of 16 and

20 feet per minute, make the IP-156 a versatile machine. The main table on this planer/molder is 15" x 20" and has front and back cast iron wing extensions that expand the size to 15" x 48". The stand is fully enclosed and equipped with integrated casters for shop mobility. A 4" dust port is also included to keep the shop clean. A spiral cutterhead is also available for this machine.

SPECIFICATIONS

Power	220V Single Phase
Horse Power	3
Outlet Size	4"
Number of Outlets	1
Weight (lbs.)	520
Table Size (Length)	48"
Table Size (Width)	15"
RPM	5000
Maximum Depth of Cut	1/8"
Cutter Head Diameter	3"
Maximum Stock Width	15"
Number of Knives	3
Maximum Stock Height	6"
Minimum Stock Thickness	3/16"
Minimum Stock Length	6"
Feed Speed	16/20 FPM
Table Elevation	Manual

Optional Accessories

SKU 1004936 4 Row Spiral Cutter Head



SCAN FOR MORE INFORMATION

Planer – IP-208



Triple belt drive



Easy to adjust table height



Proven design



SPECIFICATIONS	
Power	220V Single Phase
Horse Power	5
Outlet Size	5"
Number of Outlets	1
Weight (lbs.)	880
Table Size (Length)	55-3/4"
Table Size (Width)	20"
RPM	5000
Maximum Depth of Cut	1/8"
Cutter Head Diameter	3-1/4"
Maximum Stock Width	20"
Number of Knives	4
Maximum Stock Height	8"
Minimum Stock Thickness	1/4"
Minimum Stock Length	8"
Feed Speed	16/20 FPM
Table Elevation	Manual



Table height gauge



Looking for a good industrial planer with 20" capacity, then look at the IP-208 from Baileigh Industrial. The IP-208 planer quickly and quietly takes rough lumber and turns it into smooth boards, with its full 20" planning width. It uses heavy-duty cast iron and steel construction to keep the material steady and supported during the cut. A 220 volt single phase 5hp motor turns 4 blades at a whopping 5000 rpm. That is enough rpm to take a maximum cut of 1/8" deep. The IP-208 has a maximum cutting height of 8" and

can plane material down to 1/4". In order to keep material straight and true the IP-208 has a fully cast iron 20" x 25-3/4" table with 15" extensions. Table size with extension is an impressive 20" x 55-3/4". Unlike other planers, the IP-208 has 2 speeds that allow you to pick what's right for your project, either 16 or 20 feet per minute. Built in casters and a 5" dust port round out the IP-208 industrial planer. A spiral cutterhead is also available for this machine.




SCAN FOR MORE INFORMATION

Optional Accessories

SKU 1004941 4 Row Spiral Cutter Head

Planer – IP-2011-HD




6 row spiral blade



20 inch maximum width



Additional controls on back

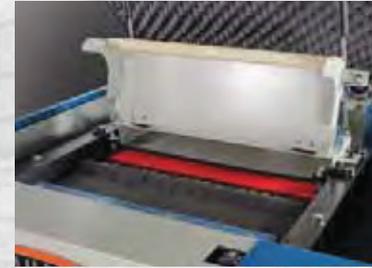

Easy access to cutter head



Digitally controlled table height



SCAN FOR MORE INFORMATION




The IP-2011-HD from Baileigh Industrial is an NC planer that has all the right features that you are looking for. This 220 volt 3 phase planer has 7.5 hp to chew through the toughest woods with ease. Its 3-13/16" spiral cutter head turns at 4500 rpm and has a maximum depth of cut at 1/4" The IP-2011-HD has a spacious table 41" x 20" that raises and lowers on four precision columns to ensure accuracy and durability. The table elevation is controlled by a digital programmer that makes

elevation changes quicker and easier. Another main feature of the IP-2011-HD is the rear pressure bar that maintains even force on the planed stock and the double roller out feed design which helps to maintain positive feeding and eliminate that "snap" that some other machines produce. The IP-2011-HD also has variable feeding speed from 0 to 32 feet per minute. This feature allows for great versatility when working with different types of wood.

SPECIFICATIONS

Power	220V Three Phase
Horse Power	7.5
Outlet Size	5"
Number of Outlets	1
Length	46"
Width	44"
Height	51"
Weight (lbs.)	1450
Table Size (Length)	41-1/4"
Table Size (Width)	20-1/4"
RPM	4500
Maximum Depth of Cut	1/4"
Cutter Head Diameter	3-13/16"
Maximum Stock Width	20"
Number of Knives	6 Row Spiral
Maximum Stock Height	11.5"
Minimum Stock Thickness	1/2"
Minimum Stock Length	11"
Feed Speed	0 to 32 FPM
Table Elevation	Digitally Controlled

Planer – IP-2511-HD




6 row spiral cutter head



25 inch maximum cutting width



Digitally controlled table height

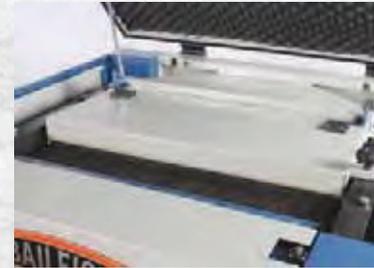

Easy access to blade



Integrated dust port

SPECIFICATIONS	
Power	220V Three Phase
Horse Power	7.5
Outlet Size	5"
Number of Outlets	1
Length	50"
Width	48"
Height	53"
Weight (lbs.)	1950
Table Size (Length)	40-1/4"
Table Size (Width)	24-3/4"
RPM	4500
Maximum Depth of Cut	1/4"
Cutter Head Diameter	3-13/16"
Maximum Stock Width	25"
Cutter Head	6 Row Spiral
Maximum Stock Height	11.5"
Minimum Stock Thickness	1/2"
Minimum Stock Length	11"
Feed Speed	0 to 32 FPM
Table Elevation	Digitally Controlled



SCAN FOR MORE INFORMATION

The IP-2511-HD is the largest in Baileigh Industrials line of Heavy Duty thickness planers, but it is also a great value. The IP-2511-HD from Baileigh Industrial is an NC planer that any shop would be proud to have. This planer can thickness up to 25" wide. This 220 volt 3 phase planer has 7.5 hp to power the 3-13/16" spiral cutter head to 4500 rpm and has a maximum depth of cut at 1/4". The IP-2511-HD also has variable feeding speed from 0 to 32 feet per minute. The table on the IP-2511-HD is 41" x 25" that raises and lowers on four

precision columns to ensure accuracy and durability. The table elevation is controlled by an easy to use digital programmer that controls the elevation changes making it quicker and easier than ever. Another main feature of the IP-2511-HD is the rear pressure bar that maintains even force on the planed stock and the double roller out feed design which helps to maintain positive feeding and eliminate that "snap" that some other machines produce. This feature allows for great versatility when working with different types of wood.

Jointer / Planer – IP-2509-HD



5 row spiral cutter head



Advanced cutting system



Digitally controlled table height



Extra long infeed/tables



The IP-2509-HD is the ultimate in numerically controlled planers. This industrial 25" planer has a 10 hp single phase motor to make sure you never run out of power even when planing full 25" boards. Another advantage of the single phase power it that it will run in almost any shop without much problem. Because of the 10 hp motor, the IP-2509-HD can take 1/4" of material at one time by spinning its spiral head cutter at 5000 rpm. The table of the IP-2509-HD is 25" x 32", but also has cast iron extensions that make the overall table size a large 25" x 57". Many special features help make this the best on the market in its

size. Oversized bearing housings ensure ultra-smooth, quiet performance and long life. Instead of only two speeds like most of the other planers on the market, the IP-2509-HD variable speed of 20 to 30 feet per minute means you will have the exact speed required. Another feature not normally found in this class is the standard PLC control which allows you to simply enter in the desired height and the bed moves automatically to that setting. You'll never want to go back to turning a hand wheel to find your thickness. The controller on the IP-2509-HD planer also has automatic backlash compensation ensuring exact thicknesses.

SPECIFICATIONS	
Power	220V Single Phase
Horse Power	10
Outlet Size	5"
Number of Outlets	1
Weight (lbs.)	1760
Table Size (Length)	57"
Table Size (Width)	25"
RPM	5000
Maximum Depth of Cut	1/4"
Cutter Head Diameter	3-3/8"
Maximum Stock Width	25"
Cutter Head	5 Row Spiral
Maximum Stock Height	9"
Minimum Stock Thickness	1/2"
Minimum Stock Length	9"
Feed Speed	20 to 30 FPM
Table Elevation	Digitally Controlled



SCAN FOR MORE INFORMATION

Jointer / Planer – JP-1250




6 row spiral blade



12 inch maximum width



Additional controls on back

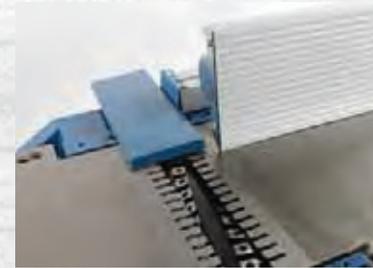

Easy access to cutter head

SPECIFICATIONS

Power	220V Single Phase
Horse Power	3
Length	65"
Width	26"
Height	46"
Weight (lbs.)	715
Table Size (Length)	59"
Table Size (Width)	15.75"
RPM	5500
Fence Size	43" x 6"
Fence Tilt	45°
Maximum Depth of Cut	3/16"
Cutter Head Diameter	3"
Maximum Stock Width	12"
Cutter Head	6 Row Spiral
Maximum Stock Height	8.5"
Minimum Stock Thickness	1/8"
Feed Speed	23 FPM
Table Elevation	Manual
Working Height	35.5"



SCAN FOR MORE INFORMATION

Planer/jointer combination machine can be one of the most used machines in any wood shop. The biggest advantage is the dual functions it performs in limited space. The JP-1250 from Baileigh Industrial is a great choice for this type of woodworking machine because its packed with features at a great price. Using a 3 hp 220 volt single phase motor, the JP-1250 spins the 3" cutter head at 5500 rpm to make quick work of any material. The JP-1250 has an extremely quick changeover period between jointing and

planing functions, in fact the fence does not have to be removed during the changeover. Heavy duty cast iron tables are machined to ensure accuracy during the cuts. An extra-large rack and pinion aluminum fence can be positioned at any angle between 45 and 90 degrees. The JP-1250 features a large hand wheel for quick and precise adjustment of the planer table. Dust ports and a heavy duty fully closed steel stand are also included with the JP-1250 planer/jointer combination machine.

Jointer / Planer – JP-1686




Push blocks included



Power lifting table with DRO



Quick planer adjustment

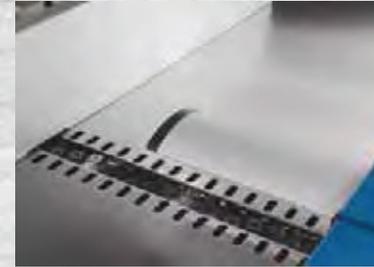

Spiral cutter head



Two feed speeds



SCAN FOR MORE INFORMATION

Sometimes a shop has limited space and needs to find a machine that has multiple functions in order to be as efficient as possible. Enter the JP-1686 jointer/planer combo. This great machine is economical and can handle most jobs thrown at it. The JP-1686 is a 220 volt three phase machine that uses a 5.5 hp motor to turn the 4 knife cutter

head at 5000 rpm. It has two feeding speeds to make easy work of every material. The 24" x 20.5" thickness table has a power lifting system to make table height adjustments with ease. The planer table is 86.5" x 16" and like the thickness table is fully made from cast iron that is milled to a perfect finish.

SPECIFICATIONS

Power	220V Three Phase
Horse Power	5.5
Length	86"
Width	32"
Height	45"
Weight (lbs.)	957
Table Size (Length)	86"
Table Size (Width)	16"
RPM	5000
Fence Size	39" x 6"
Fence Tilt	45°
Maximum Depth of Cut	3/16"
Cutter Head Diameter	3.5"
Maximum Stock Width	16"
Cutter Head	6 Row Spiral
Maximum Stock Height	9.5"
Minimum Stock Thickness	1/8"
Feed Speed	23/46 FPM
Table Elevation	Manual
Working Height	34.5"

Jointer / Planer – JP-1898-NC




Adjustable fence with dust port



Convenient planer controls



Digitally controlled lifting table

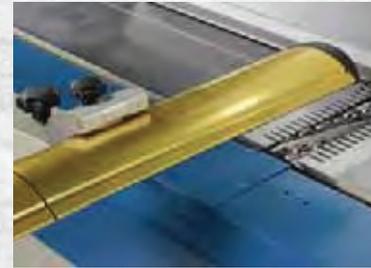

Floating blade guard



Spiral cutter head



SCAN FOR MORE INFORMATION

SPECIFICATIONS

Power	220V Three Phase
Horse Power	7.5
Length	103"
Width	40"
Height	50"
Weight (lbs.)	3036
Table Size (Length)	98"
Table Size (Width)	18"
RPM	5700
Fence Tilt	45°
Maximum Depth of Cut	5/16"
Cutter Head Diameter	4.75"
Maximum Stock Width	18"
Cutter Head	6 Row Spiral
Maximum Stock Height	9.5"
Minimum Stock Thickness	1/8"
Feed Speed	16 to 46 FPM Variable
Table Elevation	Digital Control



The JP-1898-NC jointer/planer from Baileigh Industrial is the next level in technology and performance. This great machine is a must have for any professional woodworking shop. It features an 18" working table that uses a helical cutter head for the best possible finish. To help provide this finish the machine is run by a 7.5 hp motor that runs on 220 volt three phase power. The planing station has a table length of 98" and a tilting fence

that will go between 0 and 45 degrees. It also has a manual height adjustment for greater accuracy during the cut. The jointer station has a 63" table with a maximum cutter depth of 5/16" and uses a digital control to set the height. Variable speed rubber in and out feed rollers are also standard. These rollers run at a speed of 16 to 46 feet per minute.

Spindle Shaper – SS-2421



3 inch tall spindle



Extra tall fence



Full adjustable fence with dust port



Large ground and polished table



Machine trolley included



SPECIFICATIONS	
Power	220V Single Phase
Horse Power	2
Outlet Size	3"
Number of Outlets	1
Length	27"
Width	23"
Height	44"
Weight (lbs.)	350
Table Size (Length)	24"
Table Size (Width)	21"
Spindle	3/4" & 1/2"
Speeds	2
RPM	5300/8300
Spindle Travel	3"
Fence Size	23" x 4.75"

The SS-2421 wood shaper from Baileigh Industrial offers many great features at an even better price. Running on a 2 hp 220 volt single phase motor the SS-2421 has a two speed pulley system. This system allows the operator to choose the best speed for the application; either 5300 or 8300 rpm. The spindle is interchangeable between 3/4" and 1/2" and includes

router collets for 1/2" and 1/4". The fully machined cast iron table on the SS-2421 measures, 24" x 21" and includes an extension that adds an extra 8" to the depth. The included fence system is independent from left to right for fast and easy set up and includes a safety guard. An integrated trolley is also included for easy movement around the shop.



SCAN FOR MORE INFORMATION

Spindle Shaper – SS-2822



Industrial drive system



Extra tall fence



Easy to use controls



Full safety guard



Includes table inserts

SPECIFICATIONS

Power	220V Single Phase
Horse Power	3
Outlet Size	4"
Number of Outlets	1
Length	24"
Width	21"
Height	36"
Weight (lbs.)	450
Table Size (Length)	22"
Table Size (Width)	28.5"
Spindle	3/4" & 1-1/4"
Speeds	3
RPM	3600/8500/11000
Spindle Travel	4"
Fence Size	28.5" x 4-1/4"
Maximum Tool Height	5-1/2"
T-Slot Size	3/4" x 3/8"



SCAN FOR MORE INFORMATION



Spindle molders are an essential part of any wood working shop. The SS-2822 from Baileigh Industrial is a great combination of features and price. This three speed spindle molder turns 3600, 8500, and 11000 rpms with its 3 hp 220 volt single phase motor. All controls are front mounted and are thermal overload protected. The SS-2822 is equipped with 3/4" and 1-1/4" spindles and 1/4" and 1/2" RC-3 collets. The

table of the SS-2822 is precision ground cast iron and includes a t-slot and miter gauge. The overall size of the table including extension wing is 31" x 28-1/2". A massive industrial fence is also included for accurate positioning of material. The table also includes multiple insert rings for the different spindles. An integrated 4" dust collector is incorporated into the fence as well as a cutting safety guard.

Spindle Shaper – SS-3528



4 speed pulley



Easy control access



Easy spindle height adjustment



Full adjustable fence with hold downs



Ground and polished table



SPECIFICATIONS	
Power	220V Single Phase
Horse Power	5
Outlet Size	4"
Number of Outlets	1
Length	38"
Width	32"
Height	35"
Weight (lbs.)	660
Table Size (Length)	35.5"
Table Size (Width)	28"
Spindle	3/4", 1", & 1-1/4"
Speeds	4
RPM	3600/5100/8000/10000
Spindle Travel	3"

The SS-3528 spindle shaper from Baileigh Industrial is a great addition to any shop. This is the first in the 3528 series and is the most economical in the series. This spindle shaper is powered by a 5 hp 220 volt single phase motor that offers four spindle speeds. Speeds are changed by selecting the appropriate belt for the speed desired. Speeds offered are 3600, 5100, 8000, and

10000 rpm. The SS-3528 includes 3 spindles, 3/4", 1", and 1-1/4" all with corresponding inserts. The precision machined 28" x 35" table has a working height of 35" making it very comfortable to work on. The SS-3528 also comes with all table hardware and fences for accurate placement of material. A 4" dust port is also standard.



SCAN FOR MORE INFORMATION

Spindle Shaper – SS-3528-T



5 hp motor



Overhead power controls



Tilting spindle



Includes 3 spindles

SPECIFICATIONS	
Power	220V Single Phase
Horse Power	5
Outlet Size	4"
Number of Outlets	1
Length	38"
Width	32"
Height	35"
Weight (lbs.)	900
Table Size (Length)	35.5"
Table Size (Width)	28"
Spindle	3/4", 1", & 1-1/4"
Speeds	4
RPM	3600/5100/8000/10000
Spindle Travel	3"



Ground and polished table

The SS-3528-T was built to withstand the rigors of industrial wood working production; this impressive shaper will literally cut more profiles than you can think of. Based off of the SS-3528, this unique tilting spindle shaper will add even more variety and utility to your shaping operations and the conveniently located controls and adjustments make it a safe and easy machine to use and enjoy. The SS-3528-T tilting spindle shaper is powered by a 5 hp 220 volt single phase motor that offers four spindle speeds. Speeds are changed by selecting

the appropriate belt for the speed desired. Speeds offered are 3600, 5100, 8000, and 10000 rpm. The SS-3528-T includes 3 spindles, 3/4", 1"; and 1-1/4" all with corresponding inserts. The precision machined 28" x 35" table has a working height of 35", making it very comfortable to work on. The SS-3528-T also comes with all table hardware and fences for accurate placement of material and even an angle miter gauge. A 4" dust port is also standard.



SCAN FOR MORE INFORMATION

Spindle Shaper – SS-3528-S



Easy control access



Includes 3 spindles



Includes material hold downs



Heavy duty sliding table



SPECIFICATIONS	
Power	220V Single Phase
Horse Power	5
Outlet Size	4"
Number of Outlets	1
Length	38"
Width	32"
Height	35"
Weight (lbs.)	850
Table Size (Length)	35.5"
Table Size (Width)	28"
Spindle	3/4", 1", & 1-1/4"
Speeds	4
RPM	3600/5100/8000/10000
Spindle Travel	3"

The SS-3528-S sliding table spindle shaper from Baileigh Industrial is based on the SS-3528 and a great addition to any shop. This is the first in the 3528 series that offers a sliding table to reduce material marring from pushing through the spindle. The SS-3528-S spindle shaper is powered by a 5 hp 220 volt single phase motor that offers four spindle speeds. Speeds are changed by selecting the appropriate belt for the speed desired. Speeds offered are 3600, 5100, 8000, and

10000 rpm. The SS-3528-S includes 3 spindles, 3/4", 1", and 1-1/4" all with corresponding inserts. The precision machined 28" x 35" sliding table has a working height of 35", making it very comfortable to work on. The sliding function is handled by heavy duty roller bearings for smooth action. The SS-3528-S also comes with all table hardware and fences for accurate placement of material and even an angle miter gauge. A 4" dust port is also standard.



Spindle Shaper – SS-3528-ST



Front mounted tilt control



Fully adjustable fence with dust port




Side mounted height control

SPECIFICATIONS	
Power	220V Single Phase
Horse Power	5
Outlet Size	4"
Number of Outlets	1
Length	38"
Width	32"
Height	35"
Weight (lbs.)	1050
Table Size (Length)	35.5"
Table Size (Width)	28"
Spindle	3/4", 1", & 1-1/4"
Speeds	4
RPM	3600/5100/8000/10000
Spindle Travel	3"



SCAN FOR MORE INFORMATION



Over head power controls



Sliding table with spindle tilt

The SS-3528-ST heavy duty shaper has the most features of the 3528 line of spindle shapers. This unique machine has a sliding table as well as a tilting spindle for more profiles that can be imagined. Because of these features the SS-3528-ST is the best option for professional woodworking shops everywhere. The spindle will tilt to an aggressive 45 degrees. The SS-3528-ST offers a sliding table to reduce material marring from pushing through the spindle. The SS-3528-ST spindle shaper is powered by a 5 hp 220 volt single phase motor that offers four spindle speeds.

Speeds are changed by selecting the appropriate belt for the speed desired. Speeds offered are 3600, 5100, 8000, and 10000 rpm. The SS-3528-ST includes 3 spindles, 3/4", 1"; and 1-1/4" all with corresponding inserts. The precision machined 28" x 35" sliding table has a working height of 35", making it very comfortable to work on. The sliding function is handled by heavy duty roller bearings for smooth action. The SS-3528-ST also comes with all table hardware and fences for accurate placement of material and even an angle miter gauge. A 4" dust port is also standard.

Spindle Sander – OS-1414



5 spindles included



Adjustable table angle



Convenient spindle holder



Inserts



Large power switch



SPECIFICATIONS	
Power	110V
Horse Power	0.5
Outlet Size	2"
Number of Outlets	1
Length	15"
Width	15"
Height	19"
Weight (lbs.)	85
Table Size (Length)	14"
Table Size (Width)	14"
RPM	1720
Spindle Travel	15/16"
Table Tilt	45°
Oscillations Per Minute	29

Included Spindle Sizes
1/4" x 6"
1/2" x 6"
5/8" x 6"
1-1/2" x 5-1/2"
2" x 5-1/2"

A spindle sander is one of the most useful machines in a wood shop. They allow you to sand radii with ease and accuracy. The OS-1414 is a bench top spindle sander that will be at home in any shop where space is at a premium. This 110 volt sander spins at 1720 rpm and includes spindles in 1/4", 1/2", 5/8", 1-1/2" and 2" sizes. Spindle

changes are made easy with a supplied wrench. The OS-1414 has an oversized 14" x 14" machined cast iron table that will tilt 45 degrees to the front. But besides just a straight spinning motion the OS-1414 also oscillates up and down a total of 15/16" for improved sand paper life.



SCAN FOR MORE INFORMATION

Oscillating Sander – OS-2424



Integrated spindle holder



Adjustable table angle



Table inserts



10 spindles included

SPECIFICATIONS	
Power	110V
Horse Power	1
Outlet Size	4"
Number of Outlets	1
Length	27"
Width	27"
Height	46"
Weight (lbs.)	320
Table Size (Length)	24"
Table Size (Width)	24"
RPM	1725
Spindle Travel	1-1/2"
Table Tilt	45°
Oscillations Per Minute	75

Included Spindle Sizes
1/4" x 6"
3/8" x 6"
1/2" x 6"
5/8" x 6"
3/4" x 9"
1" x 9"
1-1/2" x 9"
2" x 5-1/2"
3" x 9"
4" x 9"



SCAN FOR MORE INFORMATION

The OS-2424 oscillating spindle sander from Baileigh Industrial is truly a heavy duty professional shop machine. This sander uses a 110 volt, 1 hp motor to spin the spindle at 1725 rpm and provides oscillations of 1-1/2" to provide an extremely smooth finished surface. The OS-2424 features a precision ground 24" x 24" cast

iron table that tilts up to 45 degrees. 10 different sizes of spindles are included with the machine to provide the most sanding choices in one package. A heavy steel frame and 4" dust hood are also included to round out the OS-2424.

Edge Sander – ES-6100



90 degree tilting head



Storage cabinet



SPECIFICATIONS

Power	220V Single Phase
Horse Power	1.5
Outlet Size	4"
Number of Outlets	1
Length	50"
Width	29"
Height	36"
Weight (lbs.)	326
Table Size (Length)	33"
Table Size (Width)	11.8"
RPM	1150
Belt	100" x 6"
Fence Size	27.5" x 2.25"
Table Tilt	45°

If you are looking for an affordable high quality edge sander, then look no further than the ES-6100 from Baileigh Industrial. This economical oscillating sander has a belt that is 6" wide and 100" long that turns at 3773 feet per minute via its 220 volt single phase motor. Using 220 volt single phase allows the ES-6100 to be used just about anywhere and make it perfect for schools or small shops. The ES-6100 has an all cast iron table that is 33" by 12" and is designed to allow the

operator to sand at 180, 90 and 45 degrees. The ES-6100 also has a built in oscillation feature to ensure long belt life. Another nice feature of the ES-6100 edge sander is the built in table rise system that can raise or lower the table with just a turn of the hand wheel. The ES-6100 also has a sturdy stand that can double as a storage cabinet. A 4" dust port is also standard. For more information contact a Baileigh Industrial representative.



Edge Sander – ES-6108



Lifting front table



Miter stop



Quick change belt



Radius table



Tilting front table

SPECIFICATIONS

Power	220V Single Phase
Horse Power	2
Outlet Size	4"
Number of Outlets	2
Length	51"
Width	30"
Height	36"
Weight (lbs.)	350
Table Size (Length)	36"
Table Size (Width)	11.8"
FPM	2000
Belt	108" x 6"
Table Tilt	45°



The ES-6108 from Baileigh Industrial is the little brother of the ES-9138 oscillating edge sander. Many of the same features were carried over making this one of the best values on the market. A 220 volt single phase 2HP motor powers the belt and runs a large gearbox to provide the oscillating action. At 24 oscillations per minute the ES-6108 allows you to use the entire belt face to lengthen belt life. It features a large 6" wide belt that is 108" long and has a quick change system. To extend belt life the ES-6108 has a sturdy platen of cast iron and is covered with graphite for produc-

tion sanding. Using graphite offers great support and cooler running temps to extend belt life. The table on the ES-6108 is 36" x 11.8", one of the largest in its class. It also tilts negative 5° and to positive 45°. The whole head will tilt to run horizontal or vertical. Radii can be sanded on the end of the ES-6108 as well. An integrated stand and dual 4" dust collection ports are also included. For more information on the ES-6108 oscillating edge sander, contact a Baileigh Industrial representative today.



SCAN FOR MORE INFORMATION

Edge Sander – ES-8120



Convenient front mounted controls



Extra large miter stop



Heavy duty table lifting system



Quick change belt system



The ES-8120 from Baileigh Industrial might just be the best value in vertical edge sanders. This sander comes with all the bells and whistles that one could want and has a 6" x 118" belt. Running on a 4 hp 220 volt three phase motor the ES-8120's belt turns 3937 feet per minute; more than fast enough to take care of any job. Along with the speed of rotation the ES-8120 also oscillates 3/4" up and down to help extend belt life. The

large 41" x 8" table is adjustable from 90 to 45 degrees and has 8-1/2" of adjustable height. The ES-8120 includes many attachments that help with those unique jobs; things like belt covers and adjustable platens. Two integrated dust hoods with ducting are also included to help keep the shop clean. For more information on the ES-8120 vertical edge sander from Baileigh Industrial contact a representative today.

SPECIFICATIONS

Power	220V Three Phase
Horse Power	4
Outlet Size	4.75" & 3"
Number of Outlets	2
Length	70"
Width	36"
Height	54"
Weight (lbs.)	726
Table Size (Length)	41"
Table Size (Width)	8"
FPM	3937
Belt/Blade Size	118" x 6"
Table Tilt	45°



SCAN FOR MORE INFORMATION

Edge Sander – ES-9138



Dust port



Miter stop included



Oscillation gearbox



Radius table



Extra long table lift

SPECIFICATIONS

Power	220V Single Phase
Horse Power	3
Outlet Size	4"
Number of Outlets	2
Length	75"
Width	40"
Height	60"
Weight (lbs.)	700
Table Size (Length)	48"
Table Size (Width)	11.75"
FPM	3000
Belt/Blade Size	138.5" x 9"
Table Tilt	45°



SCAN FOR MORE INFORMATION

The ES-9138 is one of the largest oscillating edge sanders that you can get. It features a large 9" wide belt that is 138.5" long. Because of its width and length the belt will last longer and run cooler than machines with smaller belts. The ES-9138 has a large 11-3/4" x 48" table to accommodate even the largest of pieces. It will also tilt negative 5° and out to positive 45°. The 48" x 9-1/2" platen is cast iron and is covered with graphite for production sanding. Using graphite offers great

support and cooler running temps to extend belt life. The ES-9138 has 24 oscillations per minute allowing you to use the entire belt face also lengthening belt life. A 220 volt single phase 3HP motor powers the belt and runs a large gearbox to provide the oscillating action. An integrated stand and dual 4" dust collection ports are also included. For more information on the ES-9138 oscillating edge sander, contact a Baileigh Industrial representative today.

Drum Sander – SD-134



Adjustable feed table tension



Aluminum sanding drum



Fast and easy table adjustment



Heavy duty feed belt



Integrated dust port



SPECIFICATIONS

Power	110V
Horse Power	1
Outlet Size	4"
Number of Outlets	1
RPM	1725
Maximum Stock Width	13"
Maximum Stock Height	4"
Minimum Stock Thickness	1/4"
Minimum Stock Length	6"
Feed Speed	0 – 22 FPM
Sanding Drum Size	5" x 13"

The SD-134 drum sander from Baileigh Industrial would be a great addition to any shop that needs to increase the productivity of their sanding operation. This 13" wide drum sander is built to last and uses only the best quality components to ensure that it will last in any environment. The SD-134 is powered by a 110 volt 1 hp motor that turns the sanding drum at an amazing 1725 feet per minute on the 5" drum. With rotations

at that speed it will make quick work of any job. The SD-134 has a maximum capacity of 4" thick at the full 13" width, with a minimum stock length of 6". The in feed table is variable speed to ensure the best quality finish. Finish height is easily adjustable with the turn of a crank. The SD-134 comes complete with a heavy duty stand and 4" dust port.



SCAN FOR MORE INFORMATION

Drum Sander – SD-174



All steel stand



Easy access to sanding drum



Easy to read table height gauge



Heavy duty feed table



17 inch wide drum

SPECIFICATIONS

Power	110V
Horse Power	1.5
Outlet Size	4"
Number of Outlets	1
RPM	1725
Maximum Stock Width	17"
Maximum Stock Thickness	4"
Minimum Stock Thickness	1/4"
Feed Speed	0 – 22 FPM
Sanding Drum Size	5" x 17"



If you like the features of the SD-134 drum sander from Baileigh Industrial but need a little more width, look at the SD-174 drum sander. This 17" wide sander has a variable speed rubber conveyor making feeding a breeze. The SD-174 would be a great addition to any shop. Powered by a 110 volt 1-1/2 hp motor, the SD-174 can be run almost anywhere and is built to last. It has a

5" drum that runs at 1725 feet per minute, making fast work of any project. The maximum capacity of the SD-174 is 4" thick at the full 17" width, with a minimum stock length of 6". Finish height is easily adjustable with the turn of a crank and the reading of an easy to read scale. A heavy duty stamped steel stand as well as a 4" dust port rounds out this great package.



SCAN FOR MORE INFORMATION

Drum Sander – SD-255



Conveyor speed control



Dual 25 inch sanding drums



Dual dust ports



Easily adjustable conveyors



Quarter inch minimum stock thickness



SPECIFICATIONS

Power	220V Single Phase
Horse Power	3
Outlet Size	4"
Number of Outlets	2
RPM	1600
Maximum Stock Width	25"
Maximum Stock Thickness	5"
Minimum Stock Thickness	1/4"
Minimum Stock Length	6"
Feed Speed	6 – 24 FPM
Sanding Drum Size	5" 25"

If you are looking for a truly heavy duty drum sander, look no further than the SD-255 from Baileigh Industrial. This 25 inch wide sander has many features that are not available on similar models. For perfect feed speed the SD-255 has a variable speed conveyor that can be adjusted from 6 to 24 feet per minute. To ensure that the sanding drum is parallel to the conveyor belt, the SD-255 has a convenient adjustment screw. The

SD-255 heavy duty drum sander has a 3 hp motor that runs on 220 volt single phase power. This motor turns the dual 5" sanding drum at 1600 rpm. The SD-255 has a maximum work piece thickness of 5" and a minimum thickness of 1/4". Sanding belt changes are also a breeze on the SD-255. A heavy steel cabinet provides years of vibration free sanding, and dual 4" dust ports are included.



SCAN FOR MORE INFORMATION



Baileigh offers various grits



Baileigh offers various sanding belts



Baileigh offers sanding drum rolls

Baileigh Industrial strives to provide the best customer service and support for our machinery and our abrasive sanding machines are no different. Made using only state of the art equipment, this allows us to provide our customers optimal performance and durability. Specific processes are used to manufacture each belt to best suit their intended application. All of the Sanding Belts Baileigh Industrial sells are bi-directional butt spliced, allowing them to be run in either direction. Every Baileigh Industrial sanding belt uses a strong resin bond system for longer life and more value. This system is designed to provide superior performance for all wood sanding and metal grinding applications, including both ferrous and non ferrous alloys. Baileigh Industrial offers a wide line of sanding belts for any notching application and most of them are in stock and ready to ship. If you require a unique belt for a specialized application, Baileigh Industrial can handle that as well, usually in as little as one day. When you order, don't forget to ask for quantity discounts!



Splices that last long

Increase the life of your sanding belts and discs up to 500% with this sanding belt cleaner. Remove buildup of all your various sanding discs and belts with the SD-Belt Cleaner from Baileigh. It removes the accumulated particles that lodge between the abrasive grains causing a dull cut.



SD-Belt cleaner — SKU 1007012

Abrasives

Vertical Band Saw – WBS-12



Ball bearing guides



Easy adjust blade guide



Includes rip fence and miter gauge



Adjustable table



Easy to use power switch



SCAN FOR MORE INFORMATION

SPECIFICATIONS

Power	110V
Horse Power	.75
Length	36"
Width	24"
Height	50"
Weight (lbs.)	200
Table Size (Length)	19.6"
Table Size (Width)	15.75"
Blade Length	89.37" (2270 mm)
Blade Width	.24 – .59
Table Tilt	45°
Maximum Depth of Cut	7"
Maximum Stock Width	12"
Resaw	7"

Every wood shop needs a vertical band saw for those pattern cuts that need to be done from time to time. The WBS-12, 12" wood working band saw from Baileigh Industrial is a great addition to the small shop without a lot of room. This 110 volt powered vertical band saw has a 12" throat depth and a fully enclosed base with

room for storage. Adjustment of the upper and lower guide system is easy with a unique rack and hand wheel set up. The 19.5" x 15.75" table on the WBS-12 has a large extruded rail and rip fence, and an oversized aluminum miter gauge help to make accurate cuts.

Vertical Band Saw – WBS-14



Extra large flywheels




Foot brake



Miter gauge included



Rip fence included

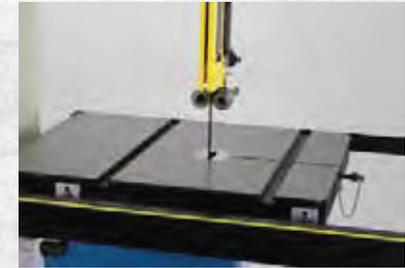

Ultra smooth table

SPECIFICATIONS	
Power	110V
Horse Power	1.5
Outlet Size	4"
Number of Outlets	2
Length	36"
Width	24"
Height	60"
Weight	300
Table Size (Length)	16"
Table Size (Width)	20"
Speeds	2
FPM	2300/3250
Blade Length	112"
Blade Width	1/8" – 3/4"
Table Tilt (Degrees)	45°
Maximum Depth of Cut	12"
Maximum Stock Width	13-5/8"
Resaw	12"



SCAN FOR MORE INFORMATION

The vertical band saw is a must in any wood working shop and the WBS-14 is the first in the Baileigh Industrial line of industrial wood working saws. This 110 volt 1.5 hp bandsaw has a large 13-5/8" throat depth and operates on two speeds 2300 or 3250 FPM. A patented blade guide system helps keep the blade perfectly

aligned for precise cuts. A foot brake and quick release blade system round out the running gear of the WBS-14. The 16" x 20" all cast iron table on the WBS-14, has the ability to tilt to 45 degrees. Many accessories such as a heavy duty rip fence and miter gauge are also included.

Vertical Band Saw – WBS-18



Oversized fly wheels



Heavy duty rip fence and miter gauge



Foot brake



Quick release table lock



Unique blade guide and material push

SPECIFICATIONS

Power	220V Single Phase
Horse Power	3
Outlet Size	4"
Number of Outlets	2
Length	40"
Width	30"
Height	65"
Weight (lbs.)	700
Table Size (Length)	20"
Table Size (Width)	24"
Speeds	2
RPM	2800/3950
Blade Size	145.5"
Table Tilt	45°
Maximum Depth of Cut	12"
Maximum Stock Width	17-5/8"
Resaw	12"

The WBS-18 woodworking band saw will be one of the most used machines in any shop. This 220 volt single phase 3 hp bandsaw has a large 17-5/8" throat depth and operates on two speeds 2800 or 3950 rpm. A patented blade guide system helps keep the blade perfectly aligned for precise cuts. A foot brake and quick release blade system round

out the running gear of the WBS-18. The WBS-18 is built to last with its fully welded steel frame. The 20" x 24" all cast iron table on the WBS-18, has the ability to tilt to 45 degrees. Many accessories such as a heavy duty rip fence and miter gauge are also included.




SCAN FOR MORE INFORMATION


Vertical Band Saw – WBS-22



Extra large flywheels

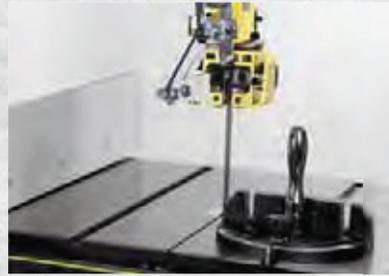

Heavy duty miter gauge and rip fence



Unique blade guide system

SPECIFICATIONS	
Power	220V Single Phase
Horse Power	5
Outlet Size	4"
Number of Outlets	2
Length	50"
Width	36"
Height	84"
Weight (lbs.)	950
Table Size (Length)	23"
Table Size (Width)	30"
Speeds	1
RPM	4900
Blade Size	172"
Table Tilt	45°
Maximum Depth of Cut	16"
Maximum Stock Width	21-5/8"
Resaw	12"



Foot brake



Includes material push mechanism

The WBS-22 vertical bandsaw is the largest in the Baileigh Industrial line of woodworking bandsaws. It has a 21-5/8" throat depth that incorporates a patented blade guide system that helps keep the blade perfectly aligned for precise cuts. A foot brake is also included as well as a quick change blade system. The WBS-22 runs on 220 volt single phase power and has a 5 hp motor

that operates at 4900 rpm. The WBS-22 is built to last with its fully welded steel frame. The enormous 23" x 30" all cast iron table, has the ability to tilt to 45 degrees. Many accessories such as a heavy duty rip fence and miter gauge are also included. Contact a Baileigh Industrial representative for more information.



SCAN FOR MORE INFORMATION

Drill Press – DP-1512B




Drill chuck included



Easy to read depth gauge



Lock out power switch

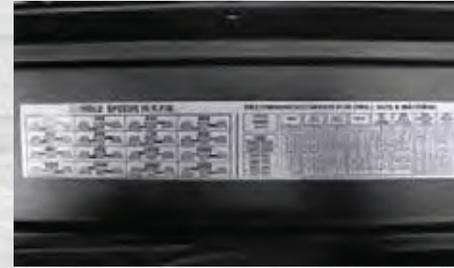

RPM chart



Two belt system

The DP-1512B 15" bench top drill press from Baileigh Industrial is a great drill press for any shop with limited floor space. This compact drill press is only about 35" tall and is best suited when mounted to a bench and still has all the features of its bigger brother the DP-1512F, including its large 15" swing and cast iron 12" by 12" table. The table also incorporates a rack and pinion system for raising and lowering. A large 3" spindle diameter makes for a rigid platform. This 110 volt bench top drill press has 12 spindle speeds that range from 250 to 3100 rpm. A range that is broad enough for just about any project. The spindle stroke for the DP-1512B is a full 3" and uses an industry standard MT2 spindle taper. The DP-1512B also includes a drill chuck with a maximum capacity of 5/8". For more information on this or any of the other Baileigh Industrial drill presses, contact a representative today.



SPECIFICATIONS

Power	110V
Horse Power	.75
Length	36"
Width	20"
Height	40"
Weight (lbs.)	134
Table Size (Length)	12"
Table Size (Width)	12"
Drill Capacity	.62"
Swing	15"
Spindle	MT2
Speeds	12
RPM	250–3100
Spindle Travel	3.1"
Column Diameter	2.8"



SCAN FOR MORE INFORMATION

Drill Press – DP-1512F



Drill chuck included



Easy speed changes



Fully cast head



SPECIFICATIONS	
Power	110V
Horse Power	0.5
Length	36"
Width	20"
Height	82"
Weight (lbs.)	134
Table Size (Length)	12"
Table Size (Width)	12"
Drill Capacity	.62"
Swing	15"
Spindle	MT2
Speeds	12
RPM	250–3100
Spindle Travel	3.1"
Column Diameter	3"

The DP-1512F floor mounted 15" drill press is a great choice for anyone that is looking for an economical belt driven drill press. The DP-1512F has 12 spindle speeds that range from 250 to 3100 rpm and is only powered by 110 volts, making it perfect for just about any shop. It features an MT2 spindle taper and includes a chuck with a maximum capacity of 5/8". It also has a full 3" of spindle stroke. The DP-1512F includes a large 15" swing and cast iron 12" by 12" table with an integrated rack and pinion system for making raising and lowering a breeze. A large 3" column diameter combined with a cast iron 19" x 11.5" base makes for a rigid platform. For more information on this or any of the other Baileigh Industrial drill presses, contact a representative today.



SCAN FOR MORE INFORMATION

Drill Press – DP-2012F



Drill chuck included



Easy to read depth gauge



Extra long pull handles



Oversized table

Need more capacity from your drill press, well look at the DP-2012F floor drill press to see if it will fit your needs. This mammoth has a 20" swing, a cast iron 16.5"x 18.5" oversized table, and can handle just about anything that you can throw at it. The 3.6" diameter column and 24" x 16.5" cast iron base make for one rigid structure. The DP-2012F uses 110 volts to turn its MT3 spindle to 4200 rpms. The range of speeds is done through the use of six pulleys that give the DP-2012F 12 spindle speeds. It also includes a drill chuck that can open to a maximum of 3/4". For more information on the DP-2012F or any of the other Baileigh Industrial floor drill presses, call and speak to a representative today.



SPECIFICATIONS	
Power	110V
Horse Power	1.5
Length	36"
Width	25"
Height	68"
Weight (lbs.)	317
Table Size (Length)	16.5"
Table Size (Width)	18.5"
Drill Capacity	.75"
Swing	20"
Spindle	MT3
Speeds	12
RPM	150–4200
Spindle Travel	4.7"
Column Diameter	3.6"



SCAN FOR MORE INFORMATION

Drill Press – DP – 15VSF



Adjustable depth stop



CSA stop emergency stop



Ground and polished work table



Includes work light



Variable speed

SPECIFICATIONS	
Power	110V
Horse Power	1
Length	36"
Width	20"
Height	82"
Weight (lbs.)	300
Table Size (Length)	18"
Table Size (Width)	14"
Drill Capacity	.7"
Swing	15"
Spindle	MT2
Speeds	Variable
RPM	400–5000
Spindle Travel	6.0"
Column Diameter	3"



The DP-15VSF is the ultimate woodworking drill press. This belt driven variable speed drill press has a true 1 hp motor that runs off of 110 volts, but can be wired to run on 220 volt single phase because of its inverter drive should the need arise. The inverter lets the MT2 spindle on the DP-15VSF turn at any speed from 400 to 5000 rpm; perfect for the wood worker. A digital readout helps determine the operating speed. Built to last, the DP-15VSF has a large 3" diameter column that allows for 15 inches of swing. For those larger projects it has a 14" x 18" table with 5/8" t-slots. The table also incorporates a rack and pinion system for moving the table up and down. A halogen work light and drill chuck round out this great variable speed drill press package.



SCAN FOR MORE INFORMATION

Mortiser – MC-625



1/2 hp motor



1/4 inch bit included



Depth stop included



Fully cast base

The MC-625 bench top mortise from Baileigh Industrial is a great choice for the home shop looking for its first square chisel machine. It has many great features for the economical price. A wide stable base helps keep material in alignment while chiseling out material. The spindle turns at 1750 rpm and runs on 110 volts, more than enough to get to the maximum chisel size of 5/8". A fully functional X/Y table is also included and at a size of 7" x 6" is large enough to handle just about any job. Adjustable depth stops, material stops, and angle material clamp make repeatability easy on this bench top mortise.



SPECIFICATIONS

Power	110V
Horse Power	0.5
Length	27"
Width	18"
Height	32"
Weight (lbs.)	110
Table Size (Length)	7"
Table Size (Width)	6"
Swing	6"
RPM	1750
Maximum Mortising Depth	3"
Chisel Capacity	5/8" or 3/4"
Drill Chuck Capacity	1/8" or 1/2"
Vertical Stroke (Table)	2.25"
Lateral Stroke (Table)	6.25"



SCAN FOR MORE INFORMATION

Mortiser – MC-1000



Depth stop included



1/4 inch bit included



Fully adjustable vise



Replaceable vise table



Stand with storage included

SPECIFICATIONS	
Power	110V
Horse Power	1
Length	23"
Width	19"
Height	58"
Weight (lbs.)	265
Table Size (Length)	15.75"
Table Size (Width)	6"
Swing	12"
RPM	1750
Spindle Travel	8.25"
Maximum Mortising Depth	3"
Chisel Capacity	1/4" to 1"
Drill Chuck Capacity	5/8" or 3/4"
Vertical Stroke (Table)	5.7"
Lateral Stroke (Table)	6.6"
Maximum Material Height	7.5"



Sometimes you just need to drill a square hole and the only good way to do it is with a mortising machine. The MC-1000 free standing mortising machine is a perfect choice for woodworking shops or educational facilities. It has many features that are not included on other machines in its class. The MC-1000 runs on 110 volts and has a chisel capacity of 1/4" to 1". The 1 hp motor produces 1750 rpm to help achieve a maximum depth of 3". A large 15-3/4" x 6" table with many fixtures makes placing and keeping the material in place for accurate chiseling. A depth stop is also included. Contact a Baileigh Industrial representative from more information on the MC-1000 mortising machine.



SCAN FOR MORE INFORMATION

Mortiser – MC-1000TT



Left tilt



Right tilt



Fully adjustable vise



1/4 inch bit included

The MC-1000TT tilting mortising machine from Baileigh Industrial is essentially the same machine as the MC-1000 but with a unique tilting table and column. This is great for those hard to reach areas and angles that pop up from time to time. This feature is great for professional shops and schools. The MC-1000TT has many features that are not included on other machines in its class. It runs on 110 volts and has a chisel capacity of 1/4" to 1". The 1 hp motor produces 1750 rpm to help achieve a maximum depth of 3". The large tilting 22-1/4" x 9" table tilts +/- 20 degrees and has many fixtures for keeping the material in place for accurate chiseling. The column also tilts +/- 20 degrees left and right. A depth stop is also included.



SPECIFICATIONS

Power	110V
Horse Power	1
Length	23"
Width	19"
Height	74"
Weight (lbs.)	350
Table Size (Length)	22.25"
Table Size (Width)	9"
Swing	12"
RPM	1750
Spindle Travel	8.25"
Table Tilt	20°
Column Tilt	20°
Maximum Mortising Depth	3"
Chisel Capacity	1/4" to 1"
Drill Chuck Capacity	1/8" or 5/8"
Vertical Stroke (Table)	5.7"
Lateral Stroke (Table)	9.4"
Maximum Material Height	8.5"



SCAN FOR MORE INFORMATION

Baileigh Industrial...Around the World—Australia



Baileigh Industrial has brought its line of Professional metal working and woodworking machinery to Australia. Rest assured, the same philosophies that have made Baileigh a worldwide leader in the industry; consistency in deliveries, high quality machinery, and solid support during and after the sale, will be true for Australia as well.

BAILEIGH INDUSTRIAL PTY. LIMITED

3/122 Melrose Drive
Tullamarine, VIC 3043
Australia

www.baileigh.com.au

Wood Lathe – WL-1220VS



3/4 hp motor



MT2 tailstock



Outboard attachment included



RPM-DRO



Tool rest



SPECIFICATIONS	
Power	110V
Horse Power	.75
Length	30"
Width	12"
Height	20"
Weight (lbs.)	120
Distance Between Centers	20"
Spindle	MT2
Tailstock	MT2
Speeds	Variable
RPM	300-3600
Tailstock Travel	2-1/4"
Tool Rest	6"
TPI	1" x 8
Face Plate	3"

The WL-1220VS from Baileigh Industrial sets a new standard in bench top wood lathes. This all cast iron lathe has a 12" swing with 20" between centers. The cast iron construction makes for a rigid structure to increase accuracy when cutting. The WL-1220VS is a variable speed lathe with

three speed ranges, 300 to 900, 600 to 1800, and 1200 to 3600 rpm. A digital readout helps determine what speed the spindle is running at. It also has an MT2 taper for spindle and tailstock. A 3" face plate and 6" tool rests are also included.

Optional Accessories

SKU 1008385	10" Tool Rest
SKU 1008386	20" Bed Extension
SKU 1011249	Starter Chisel Set (12)



SCAN FOR MORE INFORMATION

Wood Lathe – WL-1840VS



12 inch tool rest



Inverter driven variable speed



40 inch long bed



MT2 spindle with .5 inch bore



MT2 tailstock

SPECIFICATIONS	
Power	220V Single Phase
Horse Power	2
Length	55"
Width	36"
Height	48"
Weight (lbs.)	660
Swing	18"
Distance Between Centers	40"
Spindle	MT2
Tailstock	MT2
Speeds	Variable
RPM	0–3200
Tailstock Travel	4"
Tool Rest	12"
TPI	1-1/4" x 8
Headstock Bore	1/2"
Tailstock Bore	3/8"
Face Plate	6"
Index Locations	10°



Optional Accessories

SKU 1008389	Outboard Tool Rest
SKU 1011249	Starter Chisel Set (2)



SCAN FOR MORE INFORMATION



When you think of Baileigh Industrial you think of quality and that goes double for the WL-1840VS heavy duty wood lathe. This variable speed lathe is manufactured in Taiwan and is designed to last years in any shop environment. The WL-1840VS is powered by a 2 hp motor that runs through an inverter. The inverter lets the lathe run on 220 volt single phase power. The inverter has

two speed ranges because of the pulley system that it employs; 0-1200 and 0-3200 rpm. The heavy duty wood lathe has an 18" swing and 40" distance between centers for large production work. The spindle and tailstock have an MT2 taper and there is 4" travel in the tailstock barrel. The WL-1840VS has a 6" face plate and a 12" tool rest. It also has an index accuracy of 10 degrees.

Wood Lathe – WL-1847VS



6 inch face plate



14 inch tool rest



MT2 tailstock



Spindle speed DRO



Two speed inverter driven



SPECIFICATIONS

Power	220V Single Phase
Horse Power	2
Length	65"
Width	36"
Height	48"
Weight (lbs.)	600
Swing	18"
Distance Between Centers	47"
Spindle	MT2
Tailstock	MT2
Speeds	Variable
RPM	0–3200
Tailstock Travel	4"
Tool Rest	14"
TPI	1-1/4" x 8
Face Plate	6"

The WL-1847VS variable speed wood lathe from Baileigh Industrial combines great value with many features not found on lathes of this price. This is a large 18" x 47" wood lathe that is built on an all cast iron base to eliminate vibration and increase stability. A Delta® inverter handles all the power for the WL-1847VS and allows the spindle to turn from

0 to 3200 rpm and has a digital read out for accurate speed measurement. It also includes an MT2 spindle and tailstock. This economical wood lathe runs on 220 volt single phase power, which enables it to run in just about any shop. A 6" face plate and massive 14" tool rest is also included in this great package.

Optional Accessories

SKU 1011249 Starter Chisel Set (12)



SCAN FOR MORE INFORMATION

Wood Lathe – WL-2060VS



24 indexing holes



Face plate



Control panel



MT2 spindle



Tool post (optional)

SPECIFICATIONS

Power	220V Single Phase
Horse Power	3
Length	126"
Width	22"
Height	49"
Weight (lbs.)	750
Swing	20"
Distance Between Centers	60"
Spindle	MT2
Tailstock	MT2
Speeds	Variable
RPM	50–1000/100–2000/150–3000
Tailstock Travel	4"
Tool Rest	12"
TPI	1-1/4" x 8
Face Plate	6"



SCAN FOR MORE INFORMATION

Optional Accessories

SKU 1008391	Outboard Tool Rest
SKU 1011249	Starter Chisel Set (12)

The WL-2060VS is the biggest in the Baileigh Industrial line of woodworking lathes. The large pattern makers lathe features a 20 inch swing and 60 inches between centers, making it large enough for almost any project. Massive cast iron construction, make this one of the most rigid lathes on the market, this is good because of its large inboard turning capacity. A built-in inverter for variable-speed spindle control powers the 3 hp motor

without requiring 3-phase power make this heavy-duty wood lathe the only choice for serious wood turners. The variable-speed control knob and digital RPM readout make it easy to dial in the perfect spindle speed. The WL-2060VS also offers the option of outboard turning, this is especially important when turning large projects.

Dust Collector – DC-1300B



4 inch inlet



Extra rigid structure



Reinforced Hose



2 hp motor

Keep your shop clean and comfortable with the DC-1300B bag style dust collector. This 1-1/2 hp dust collector includes 30 micron upper and lower bags and is perfect for any shop large or small. It gives superior air flow and improved service for long runs of hose or duct systems. This unit generates 1300 cfm and runs on 110 volts; much less power than similar units, yet providing nearly the same performance as similar units with 2 hp or more.



SPECIFICATIONS	
Power	110V
Horse Power	1.5
CFM	1300
Outlet Size	6" x 4"
Number of Outlets	2
Length	40"
Width	32"
Height	75"
Drum Capacity (Gallon)	N/A
Remote Start	No
Micron Bags	30



SCAN FOR MORE INFORMATION

Dust Collector – DC-1650B



30 micron collection bag



All steel ducting



Dual inlets



Portable



2 hp motor

SPECIFICATIONS	
Power	220V Single Phase
Horse Power	2
CFM	1650
Outlet Size	6" x 4"
Number of Outlets	2
Length	40"
Width	32"
Height	75"
Drum Capacity (Gallon)	N/A
Remote Start	No
Micron Bags	30



The DC-1650B dust extraction system from Baileigh Industrial is a must for any woodworking shop. This 220 volt single phase 2 hp dust collector features 30 micron upper and lower bags and produces 1650 cfm to eliminate the finest sawdust, dirt and debris. Four locking, swivel casters enable easy transport of your dust collector to anywhere it's needed.



SCAN FOR MORE INFORMATION

Dust Collector – DC-2300B



Fully sealed joints



All steel ducting



Dual 30 micron bag set



Triple inlet



SPECIFICATIONS

Power	220V Single Phase
Horse Power	3
CFM	2300
Outlet Size	8" x 4"
Number of Outlets	3
Length	61"
Width	22"
Height	75"
Drum Capacity (Gallon)	N/A
Remote Start	No

Have a multitude of machines that need to be on one dust collection system? If so the DC-2300B might just be your answer. The DC-2300B dust collector is strong enough to use with planers, wide belt sanders, table saws, and most other woodworking machines. This 220 volt single phase dust collector uses a 3 hp motor to provide 2300 cfm. The integrated all metal ducting provides great air flow that virtually eliminates all particles from the air into its 30 micron upper and lower bags. There are three inlets and the size for the DC-2300B is 8" x 4". Four swivel casters are also included and the DC-2300B's conveniently located handles allow for easy mobility.



SCAN FOR MORE INFORMATION

Dust Collector – DC-600C



1.5 hp motor



Dual dust inlets



Durable coupler



Filter cleaning mechanism



Sight window



Waste drum with wheels

SPECIFICATIONS

Power	110V
Horse Power	1.5
CFM	600
Outlet Size	6" x 4"
Number of Outlets	2
Length	40"
Width	32"
Height	75"
Drum Capacity (Gallon)	20
Remote Start	No
Decibels	70



The DC-600C cyclone dust collector from Baileigh Industrial is truly a unique product in the industry. This 600 cfm cyclone style dust collector is unlike anything on the market because of its small foot print and it runs a 1.5 hp motor on only 110 volts. The voltage allows it to be used anywhere imaginable. But just because it has a small foot print doesn't mean that it is short on features. The DC-600C has a 20 gallon collection drum capacity and two 6" x 4" inlets for hooking up multiple machines. For optimal air purification the DC-600C cyclone dust collector has a canister style filter with a manual clean out feature. Four locking swivel casters round out this great package.



SCAN FOR MORE INFORMATION

Dust Collector – DC-1450C



Dual inlets



Remote start



Filter with mechanical cleaning



Large capacity waste drum



Quick release drum



Precision, Performance, Perfection, that is what Baileigh Industrial stands for, and that is just what you get with the DC-1450C cyclone dust extractor. This compact 2 hp cyclone dust collector is one of the most powerful in the industry. Designed to have a small footprint, the DC-1450C is the perfect size for basement shops and shops with limited space. The unique impeller provides 1450 cfm more than enough to extract particles from multiple machines. In fact the DC-1450C has two inlets that are 6" x 4" making the unit perfect for small central systems. The DC-1450C cyclone dust extractor has an easily removable 28 gallon steel drum with a window on the side so you can see how much dust you are collecting. It even has casters for mobility. Unlike other dust collection systems the DC-1450C is equipped with a 1 micron canister filter that prevents fine dust from escaping into the shop. The filter is made of a strong filter paper with a steel mesh body and has a manually operated flapper inside to help with cleaning. This eliminates dust buildup that limits airflow. Other features are a remote start switch and casters for portability.



SPECIFICATIONS	
Power	220V Single Phase
Horse Power	2
CFM	1450
Outlet Size	6" x 4"
Number of Outlets	2
Length	40"
Width	32"
Height	75"
Drum Capacity (Gallon)	28
Remote Start	Yes
Decibels	72



SCAN FOR MORE INFORMATION

Dust Collector – DC-2100C



63 gallon waste drum



Quick release drum



Electrical box with remote start



Heavy duty filter



Mechanical filter cleaner

SPECIFICATIONS	
Power	220V Single Phase
Horse Power	3
CFM	2111
Outlet Size	6" x 4"
Number of Outlets	3
Length	61"
Width	22"
Height	75"
Drum Capacity (Gallon)	63
Remote Start	Yes
Decibels	73



The DC-2100C 3 hp cyclone dust collector was designed to be the best on the market with no part of the design process overlooked. The 220 volt single phase 3 hp motor is designed to run all day long and stay cooler than others in the industry. The DC-2100C also uses a unique style fan to produce a whopping 2111 cfm, more than enough air flow to overcome some of the resistance that is brought on by the piping from machine to collector. It even has remote start and shut off for convenience. The DC-2100C has a 63 gallon capacity drum, its collector is truly designed to be used and abused. But when it is time to empty, it has a quick release lever that allows the drum to slide right out. It also has casters for portability. The DC-2100C 3 hp cyclone dust collector has a one micron canister to ensure that fine dust doesn't get back into the shop. Cleaning the canister is fast with a manual turn crank that allows the dust to fall into a plastic bag for easy removal and disposal.



SCAN FOR MORE INFORMATION

Draft Table – DDT-3519



Adjustable material stop



Dual filters



Flip down side panels



Knee switch



Removable table segments



SPECIFICATIONS	
Power	110V
Horse Power	0.5
CFM	1790
Length	42"
Width	24"
Height	34"
Table Size (Length)	19.6"
Table Size (Width)	35.4"
Filter Size	16" x 20" x 1"


The DDT-3519 is perfect for the home shop or school environment; this stand alone down draft table will allow you to use your router or sander without the worry of fine dust particles floating in the air. This large 35" x 19" table is perfect for those small projects where hand work is required. Powered by a 110 volt 1/2 hp motor the DDT-3519 produces a whopping 1790 cfm, more than enough to take away all dust particles. The air is filtered

by two 5 micron filters and there is a convenient removable catch tray to help trap all the larger particles. The top of the DDT-3519 down draft table has integrated rubber grommets to help keep the workpiece in place during use. There are also movable stops for those more intricate projects. The sides of the table also fold down for longer pieces when needed. Contact a Baileigh Industrial representative for more information.



SCAN FOR MORE INFORMATION

Draft Table – DDT-5921



Adjustable material stop



Extra large work table



Material drawers



Removable table segments



Dual filters

SPECIFICATIONS

Power	110V
Horse Power	0.5 x 2
CFM	1790 x 2
Length	65"
Width	26"
Height	34"
Table Size (Length)	21.6"
Table Size (Width)	59"
Filter Size	16" x 20" x 1"



For a little more capacity in a downdraft table, take a look at the DDT-5921. This unique table features a split sided design that incorporates two 110 volt 1/2 hp motors that produce 1790 cfm each. This design is nice for times when you don't have enough to fill up a whole table. With a table that measure 59" x 21" it is a lot to try and fill. By splitting the functions of the table in two, the table becomes more efficient. To ensure clean air is returned to the environment, the air is filtered by

two 5 micron filters and there is a convenient removable catch tray to help trap all the larger particles. To make sure that the material that you are working on doesn't move, the top of the DDT-5921 down draft table has rubber grommets to help keep the wood in place. There are also movable stops for those more intricate projects. The sides of the table also fold down for longer pieces when needed. Contact a Baileigh Industrial representative for more information.



SCAN FOR MORE INFORMATION

Collection



DC—Replacement Bags, SKU—1002701

Keep your Baileigh Industrial dust collector looking its best with authentic Baileigh Industrial replacement bags. The DC-Replace-ment Bag is a pack of 10 replacement plastic bags; each bag features the Baileigh Industrial logo.



Dust Collector Accessory Kits, SKU—1002680 & 1002686

The Baileigh Industrial accessory kits are the perfect complement to your new dust collector. Available in a number of versions these kits are an all in one system to hook up any power tool, creating a dust free environment. Call us today for details .



DC—Hose, SKU—1002698

Baileigh Industrial is pleased to offer the DC-Hose. This is a must have for anybody that is adding machinery to an existing dust collector. This 4" clear flexible hose is 15 meters or 50 feet in total length and features the exact same construction as the hose that comes with the Baileigh Industrial line of dust collectors. Made of clear vinyl the DC-Hose is strong, flexible, and durable. Reinforced with heavy duty wire .050 thick, this dust collection hose will not collapse, even under heavy suction.



DC—Canister, SKU—1002697

Upgrade the filtration on your Baileigh Industrial dust collector! This is the perfect add on to the Baileigh Industrial line of bag style dust collectors for those small shops or schools that are concerned about air quality. The DC-canister filter has more surface area than a bag filter, giving you more filtration between your lungs and shop dust.